



Triathlon Frame Selection

12/10/2019

CLIENT NAME:


Alastair Parry

BICYCLE SHOP NAME:


**Onebody
16/9 Hoyle Ave**

FIT DATA


SADDLE HEIGHT OVER
BOTTOM BRACKET:

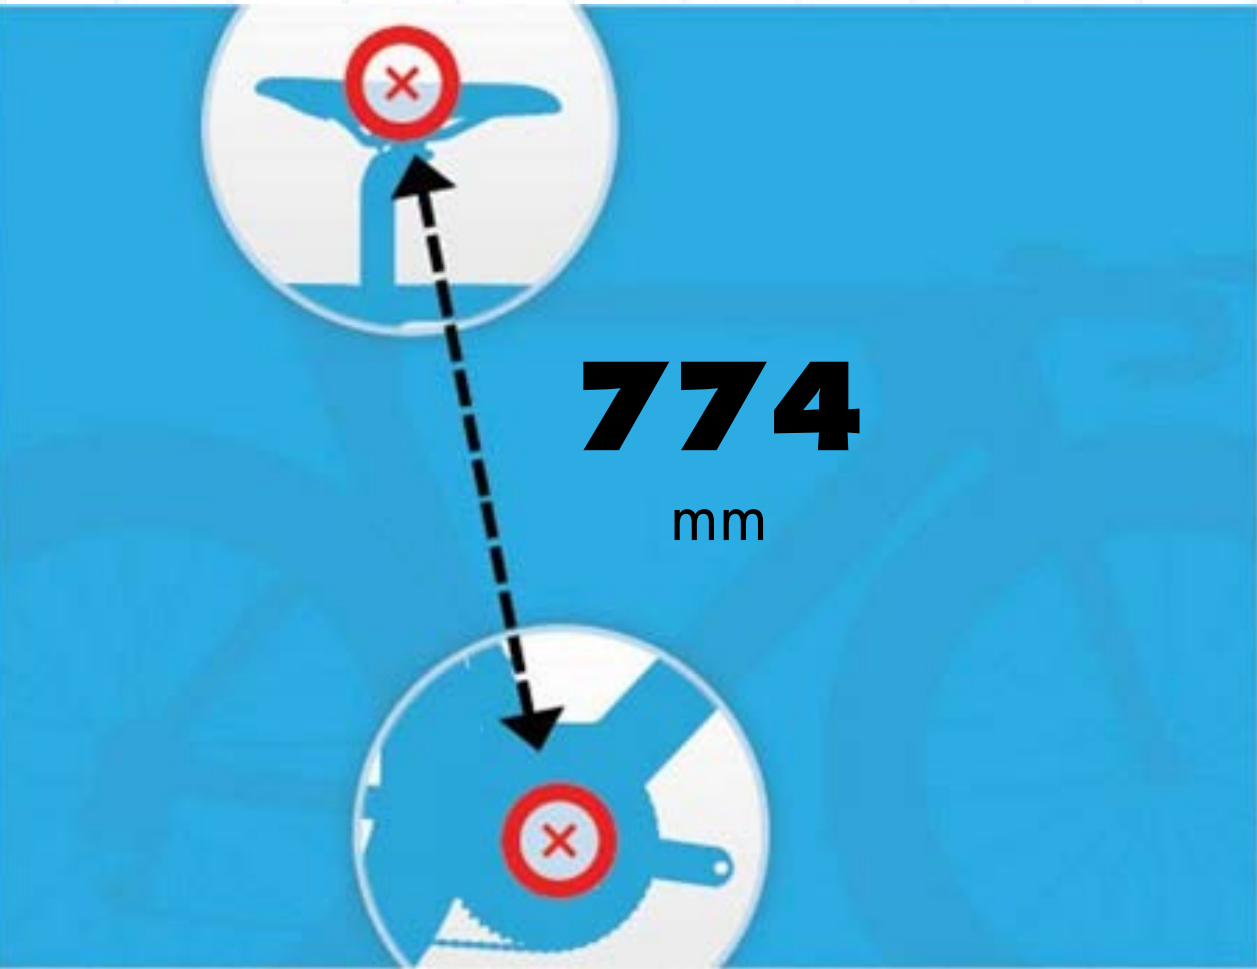


SADDLE SETBACK:

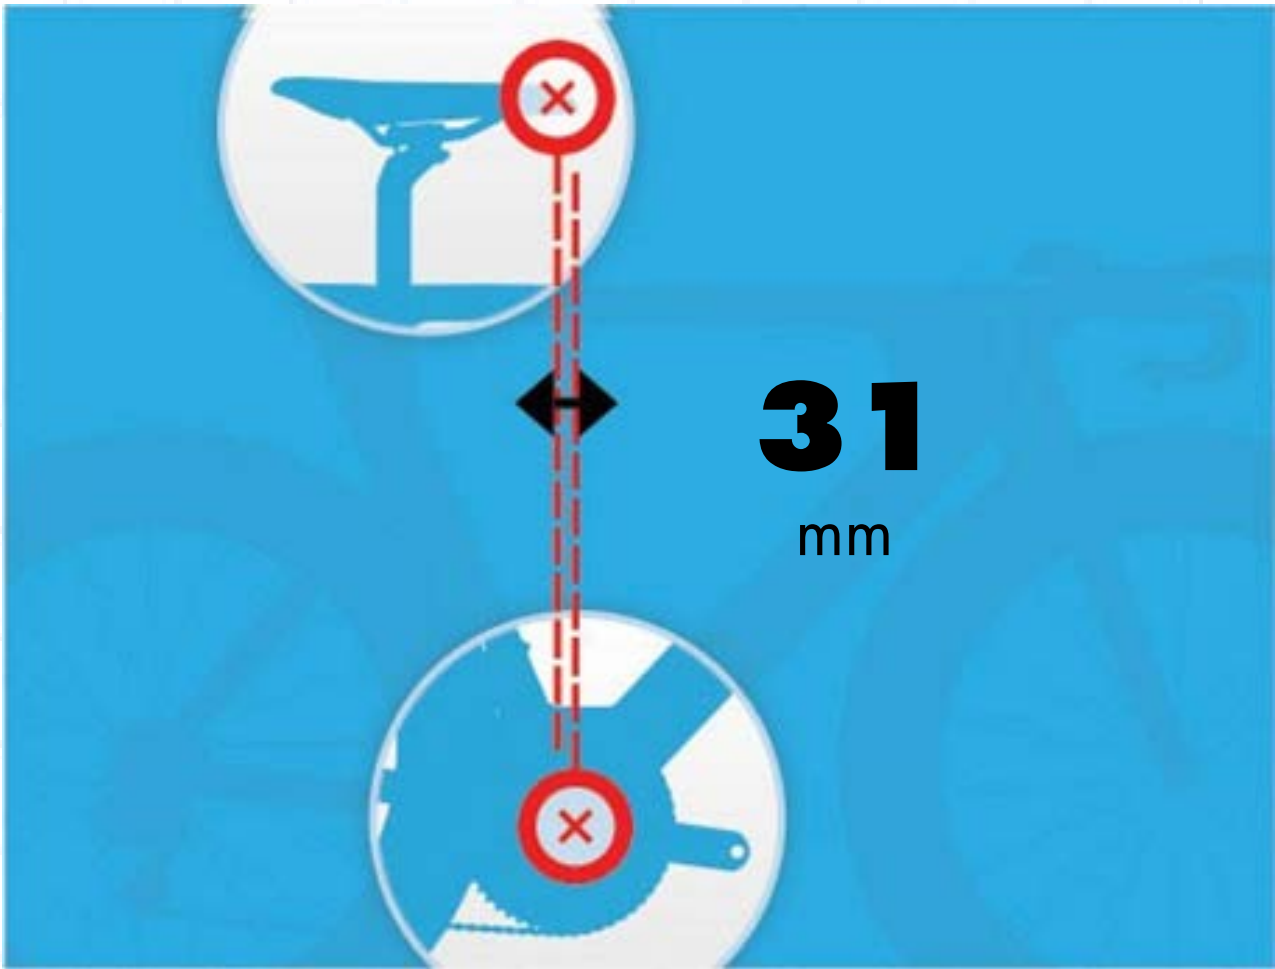


DROP FROM SADDLE
TO BARS:

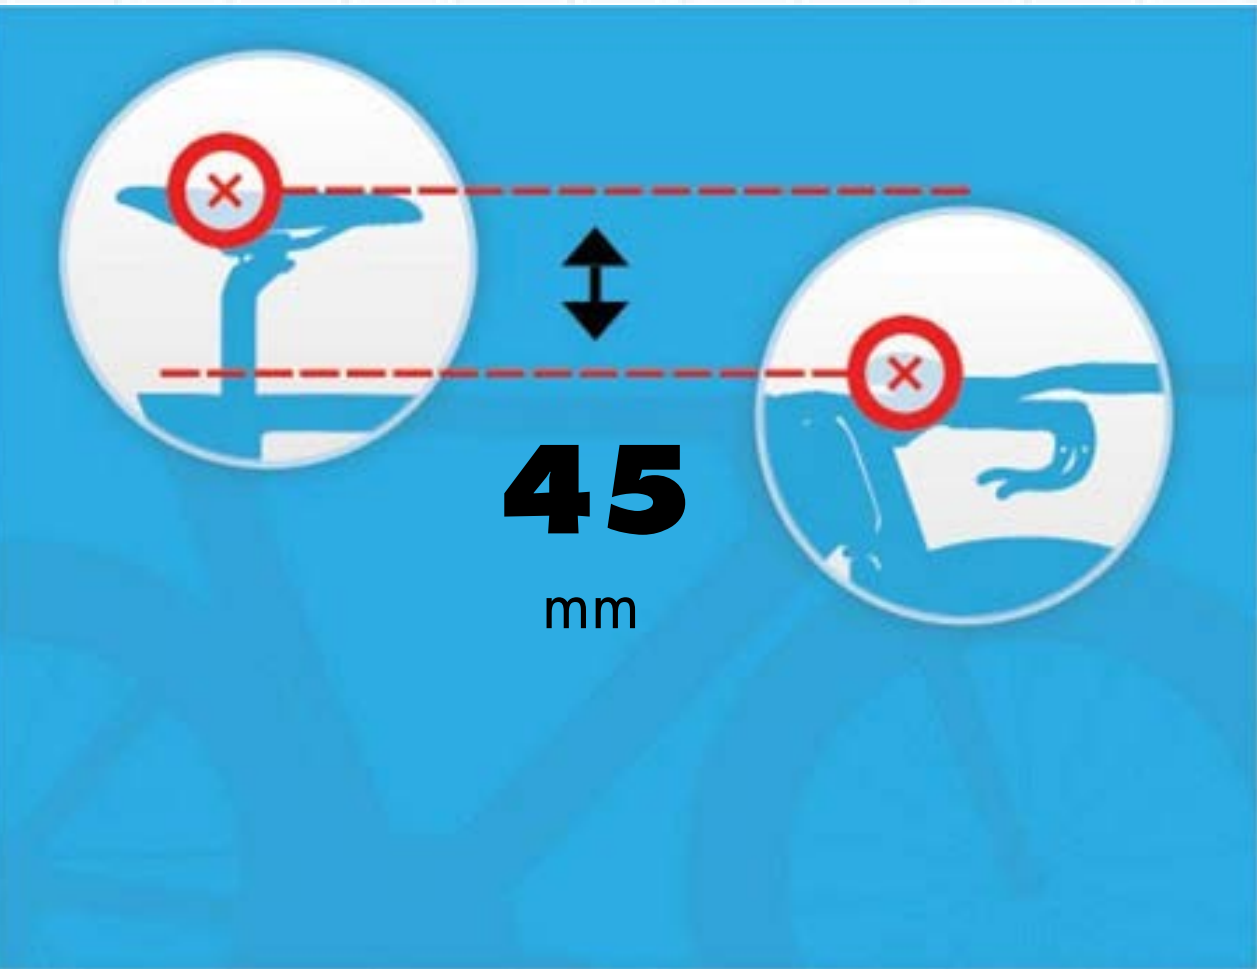


REACH FROM SADDLE
TO BARS:

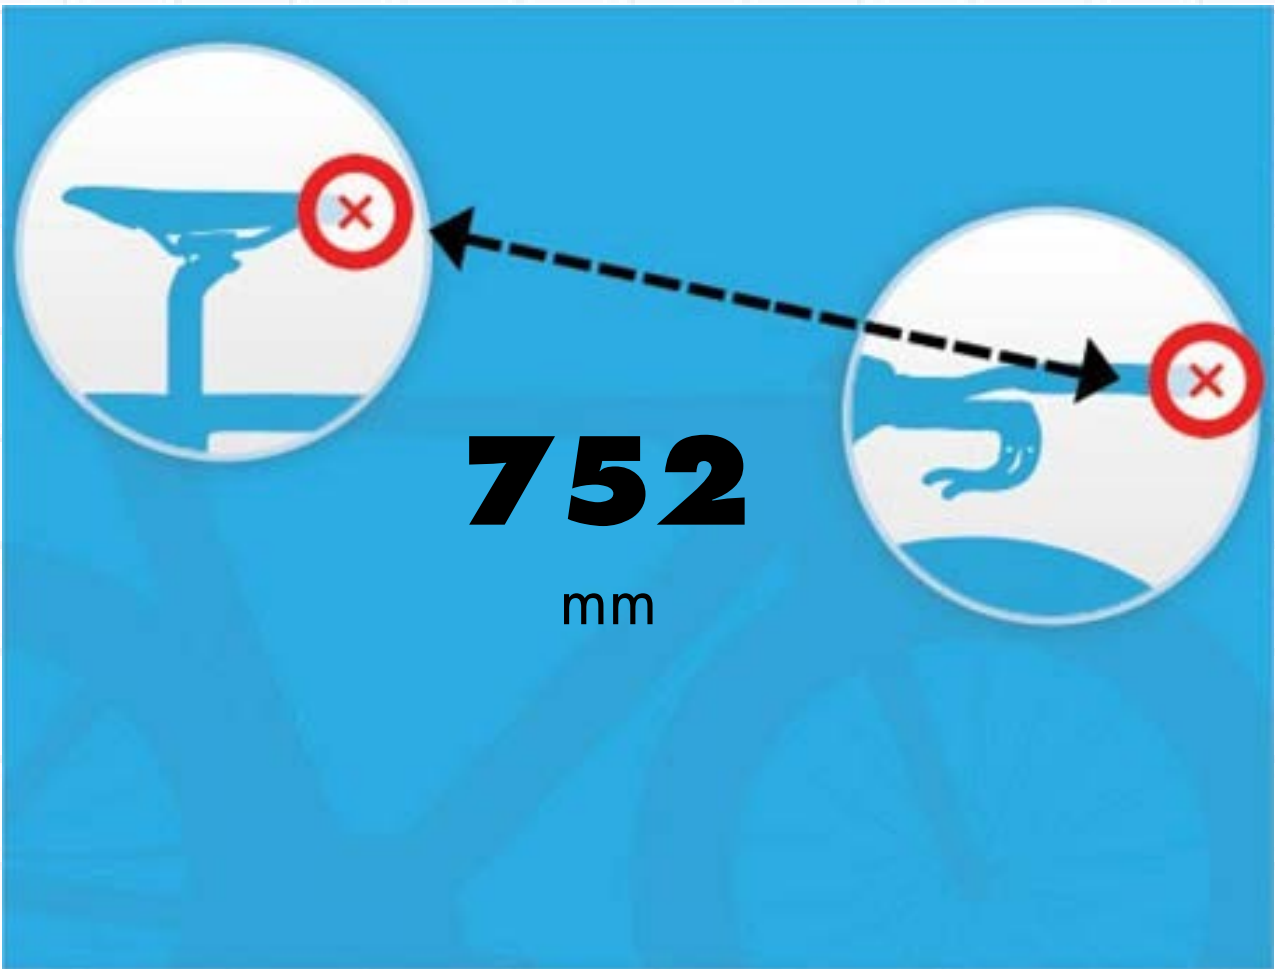


X/Y Data

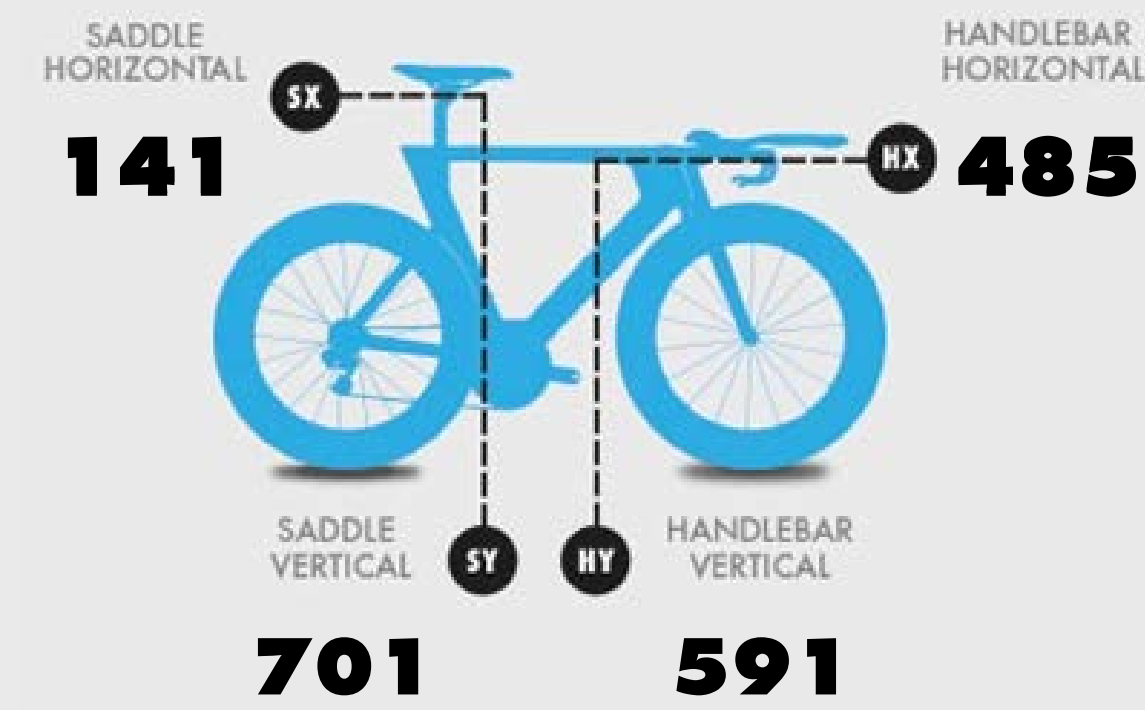

Equipment Information

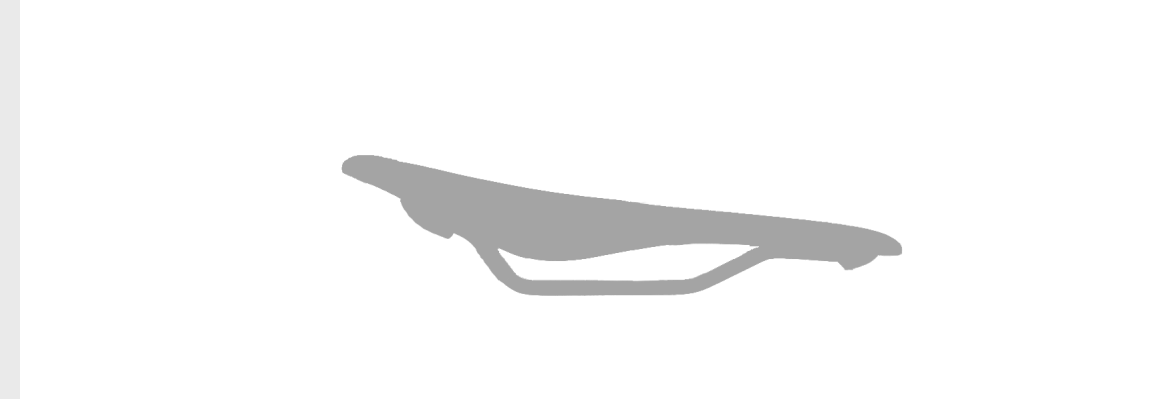

ISM Adamo PS 1.1
Saddle thickness (mm): 60
Saddle clamp to nose (mm): 110

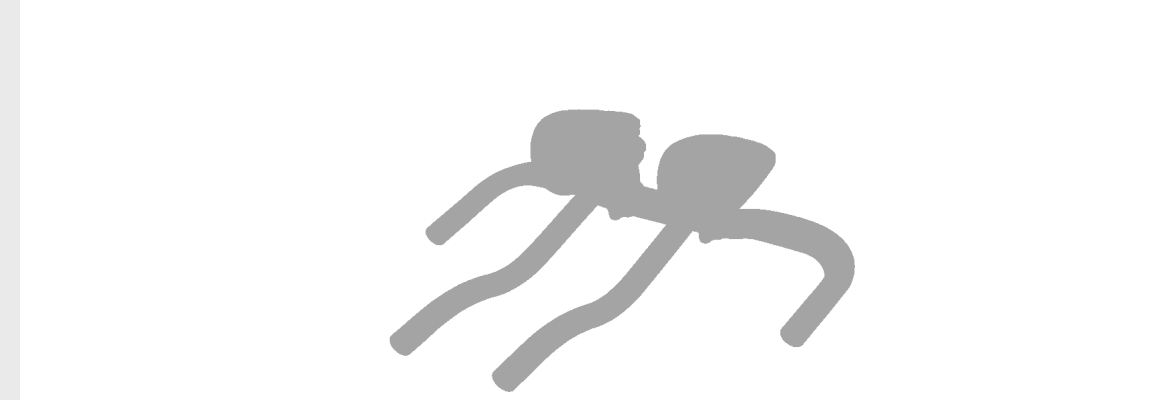


Profile Design
Pad reach (mm): 410
Pad stack (mm): 716
Extension length (mm): 310
Pad Height (mm): 125

Notes

Fit Name:	Date of fit:	Fit Operator:	Bike Type:	Store Name:
Triathlon Frame Selection	12/10/2019	admin	Triathlon / Time Trial	Onebody 16/9 Hoyle Ave

RECOMMENDED BIKE:

Quintana Roo PR Series 54

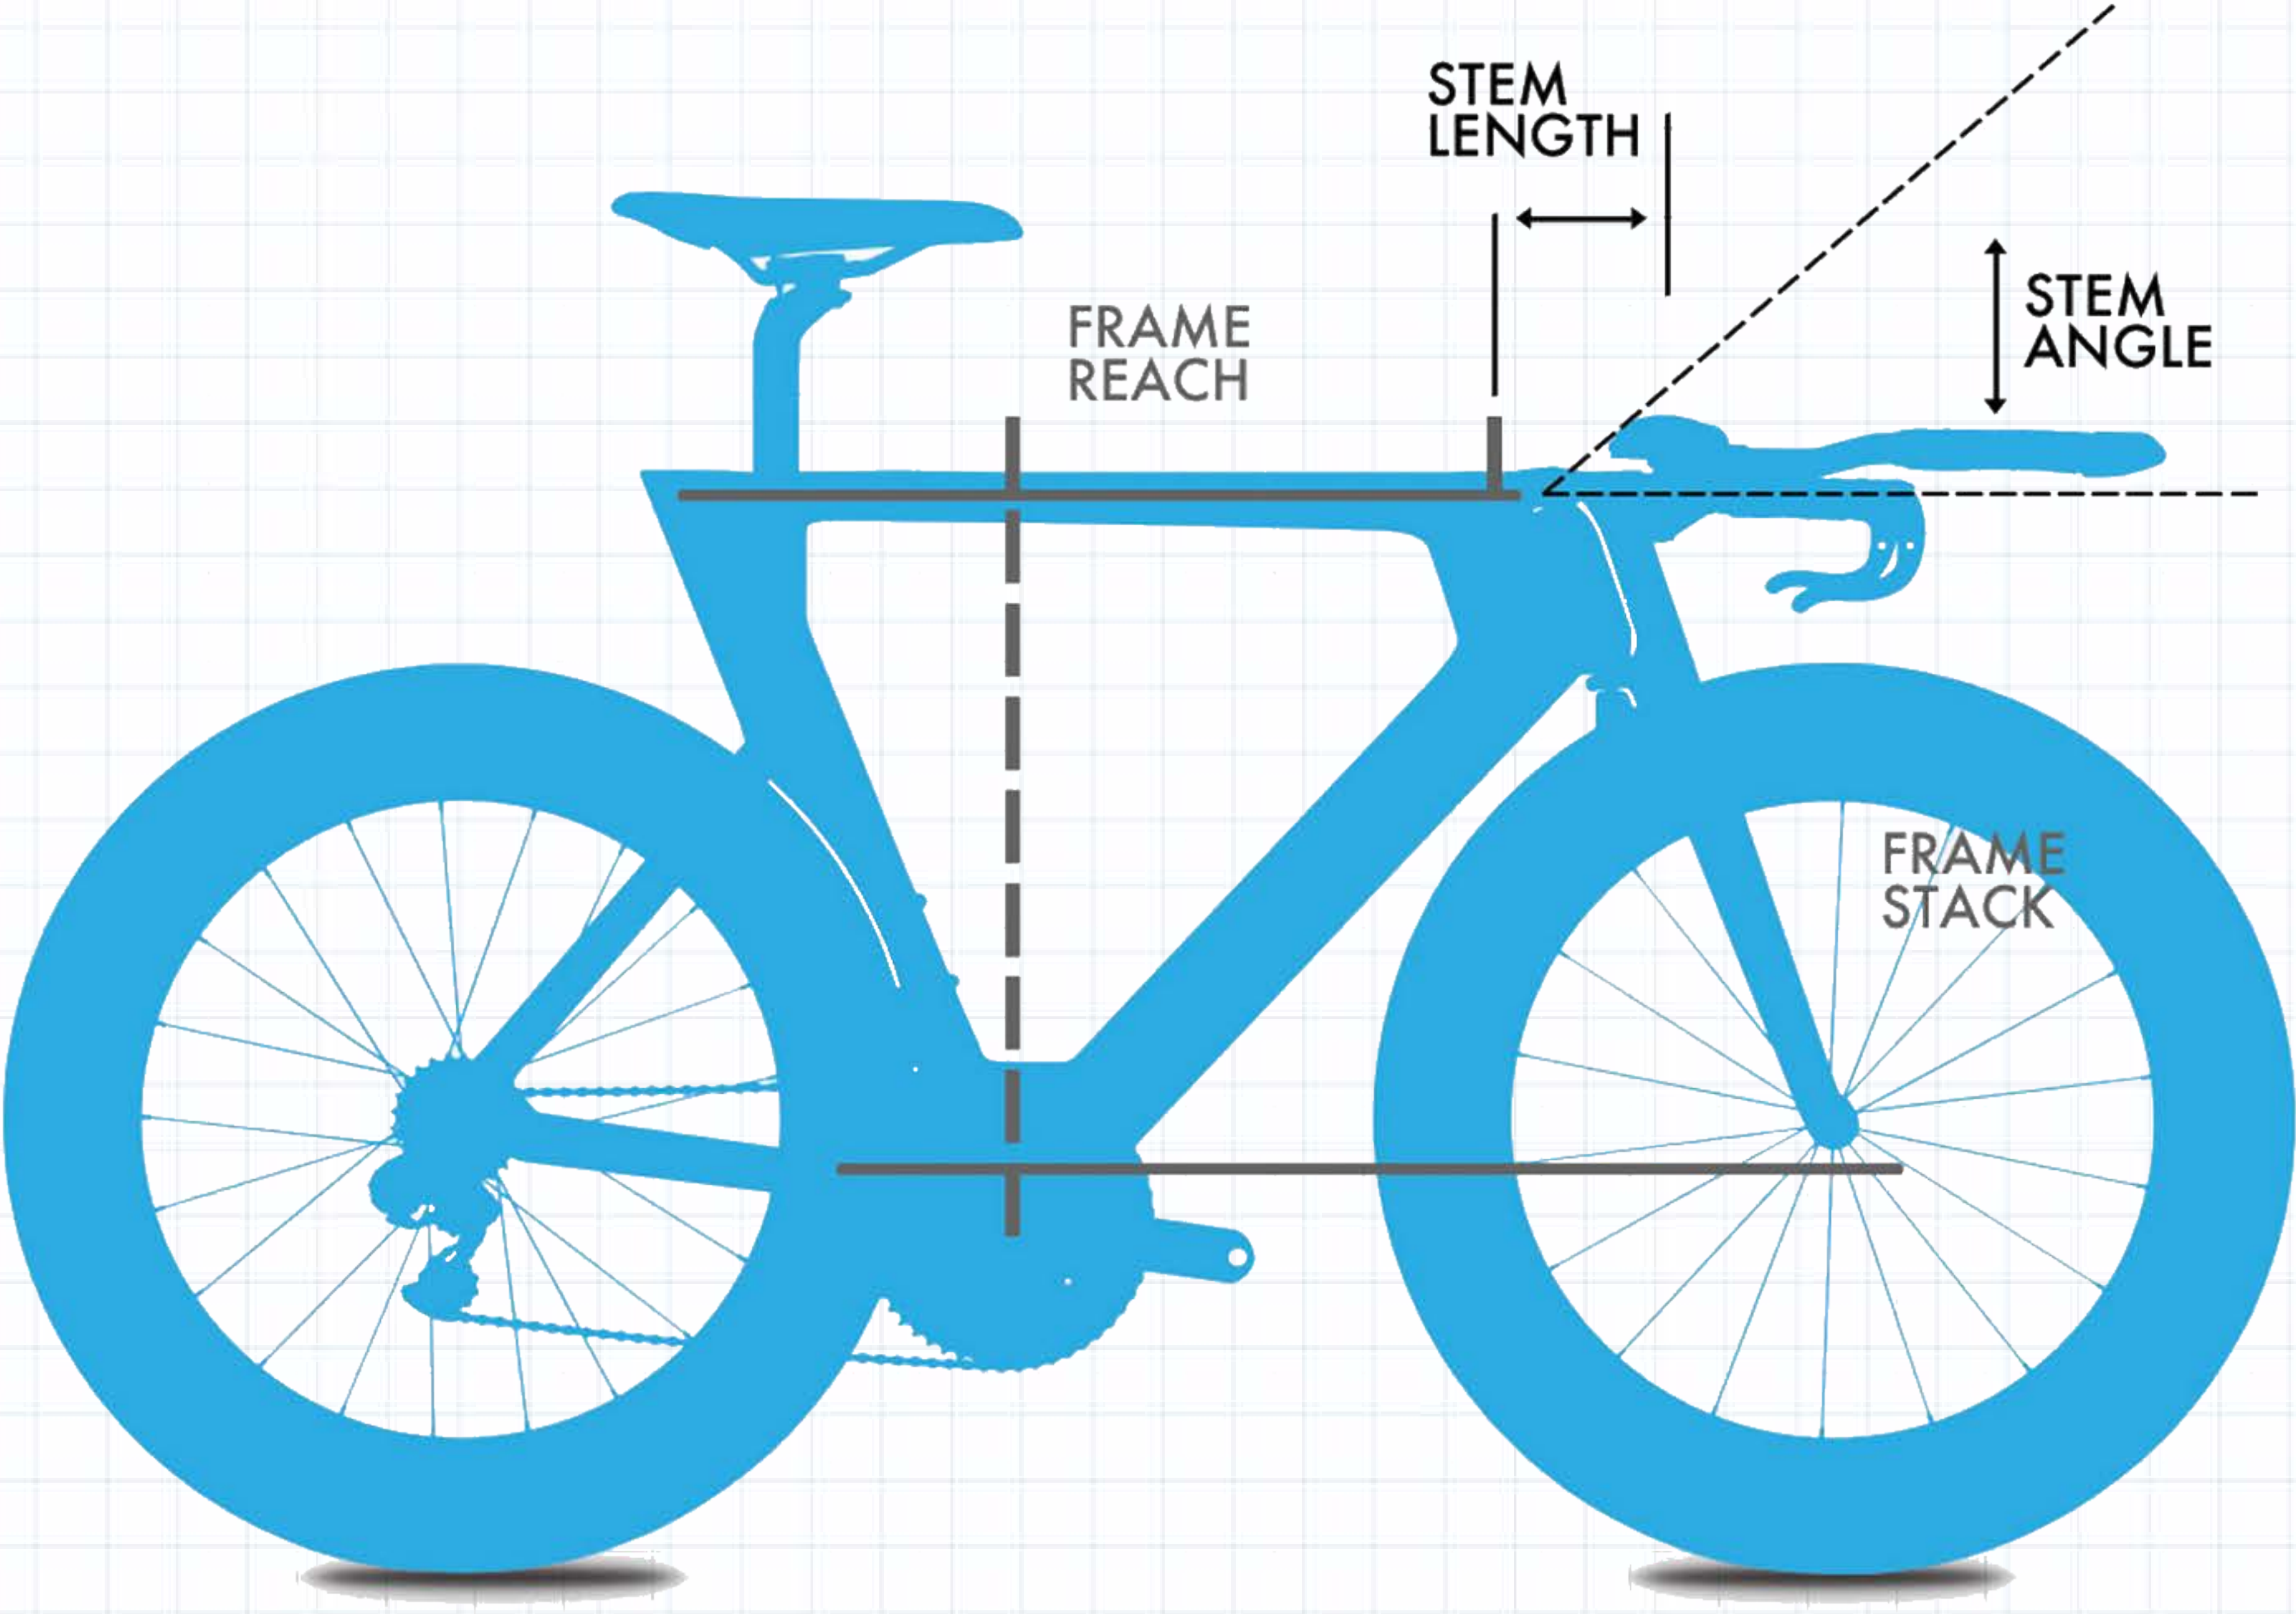


BIKE CONFIGURATION

Stem Length	70 mm
Stem Angle	-6 °
Spacers	15 mm
Frame Reach	425 mm
Frame Stack	540 mm

Fit Name:	Date of fit:	Fit Operator:	Bike Type:	Store Name:
Triathlon Frame Selection	12/10/2019	admin	Triathlon / Time Trial	Onebody 16/9 Hoyle Ave

RECOMMENDED BIKE:

Argon 18 E-117 Tri M

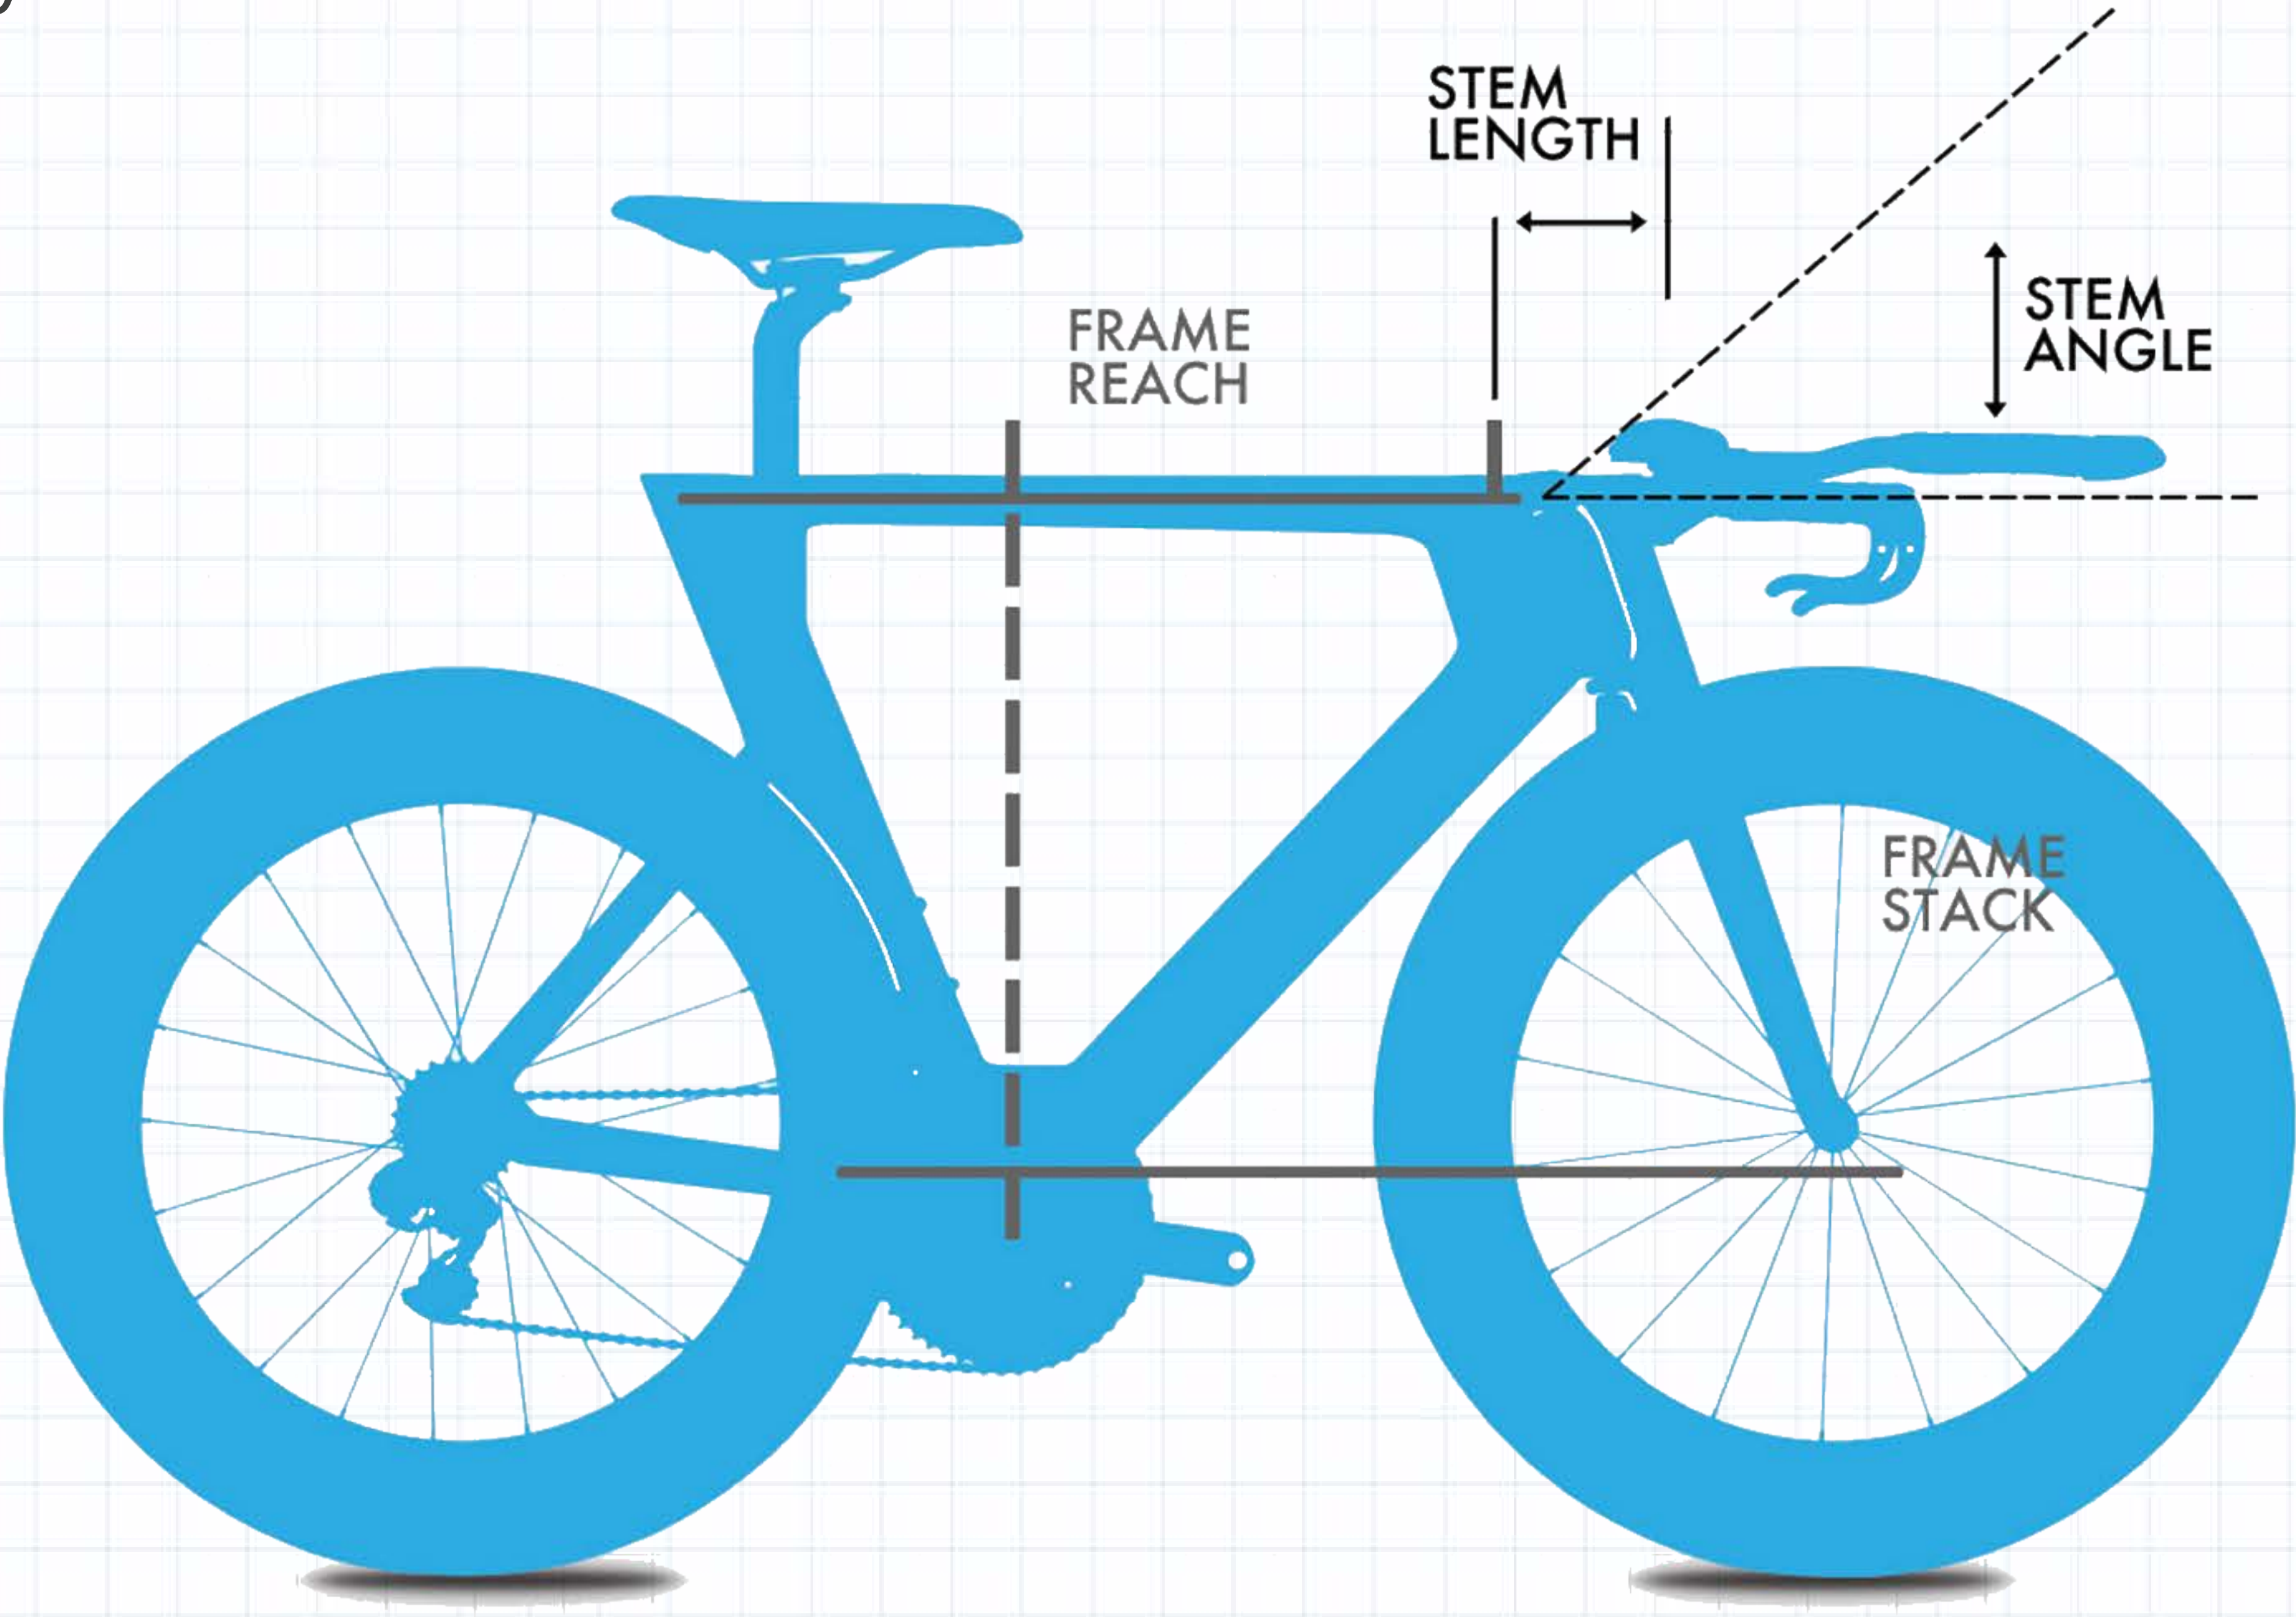


BIKE CONFIGURATION

Stem Length	100 mm
Stem Angle	-6 °
Spacers	35 mm
Frame Reach	405 mm
Frame Stack	515 mm

Fit Name:	Date of fit:	Fit Operator:	Bike Type:	Store Name:
Triathlon Frame Selection	12/10/2019	admin	Triathlon / Time Trial	Onebody 16/9 Hoyle Ave

RECOMMENDED BIKE:

Cervelo p2 56

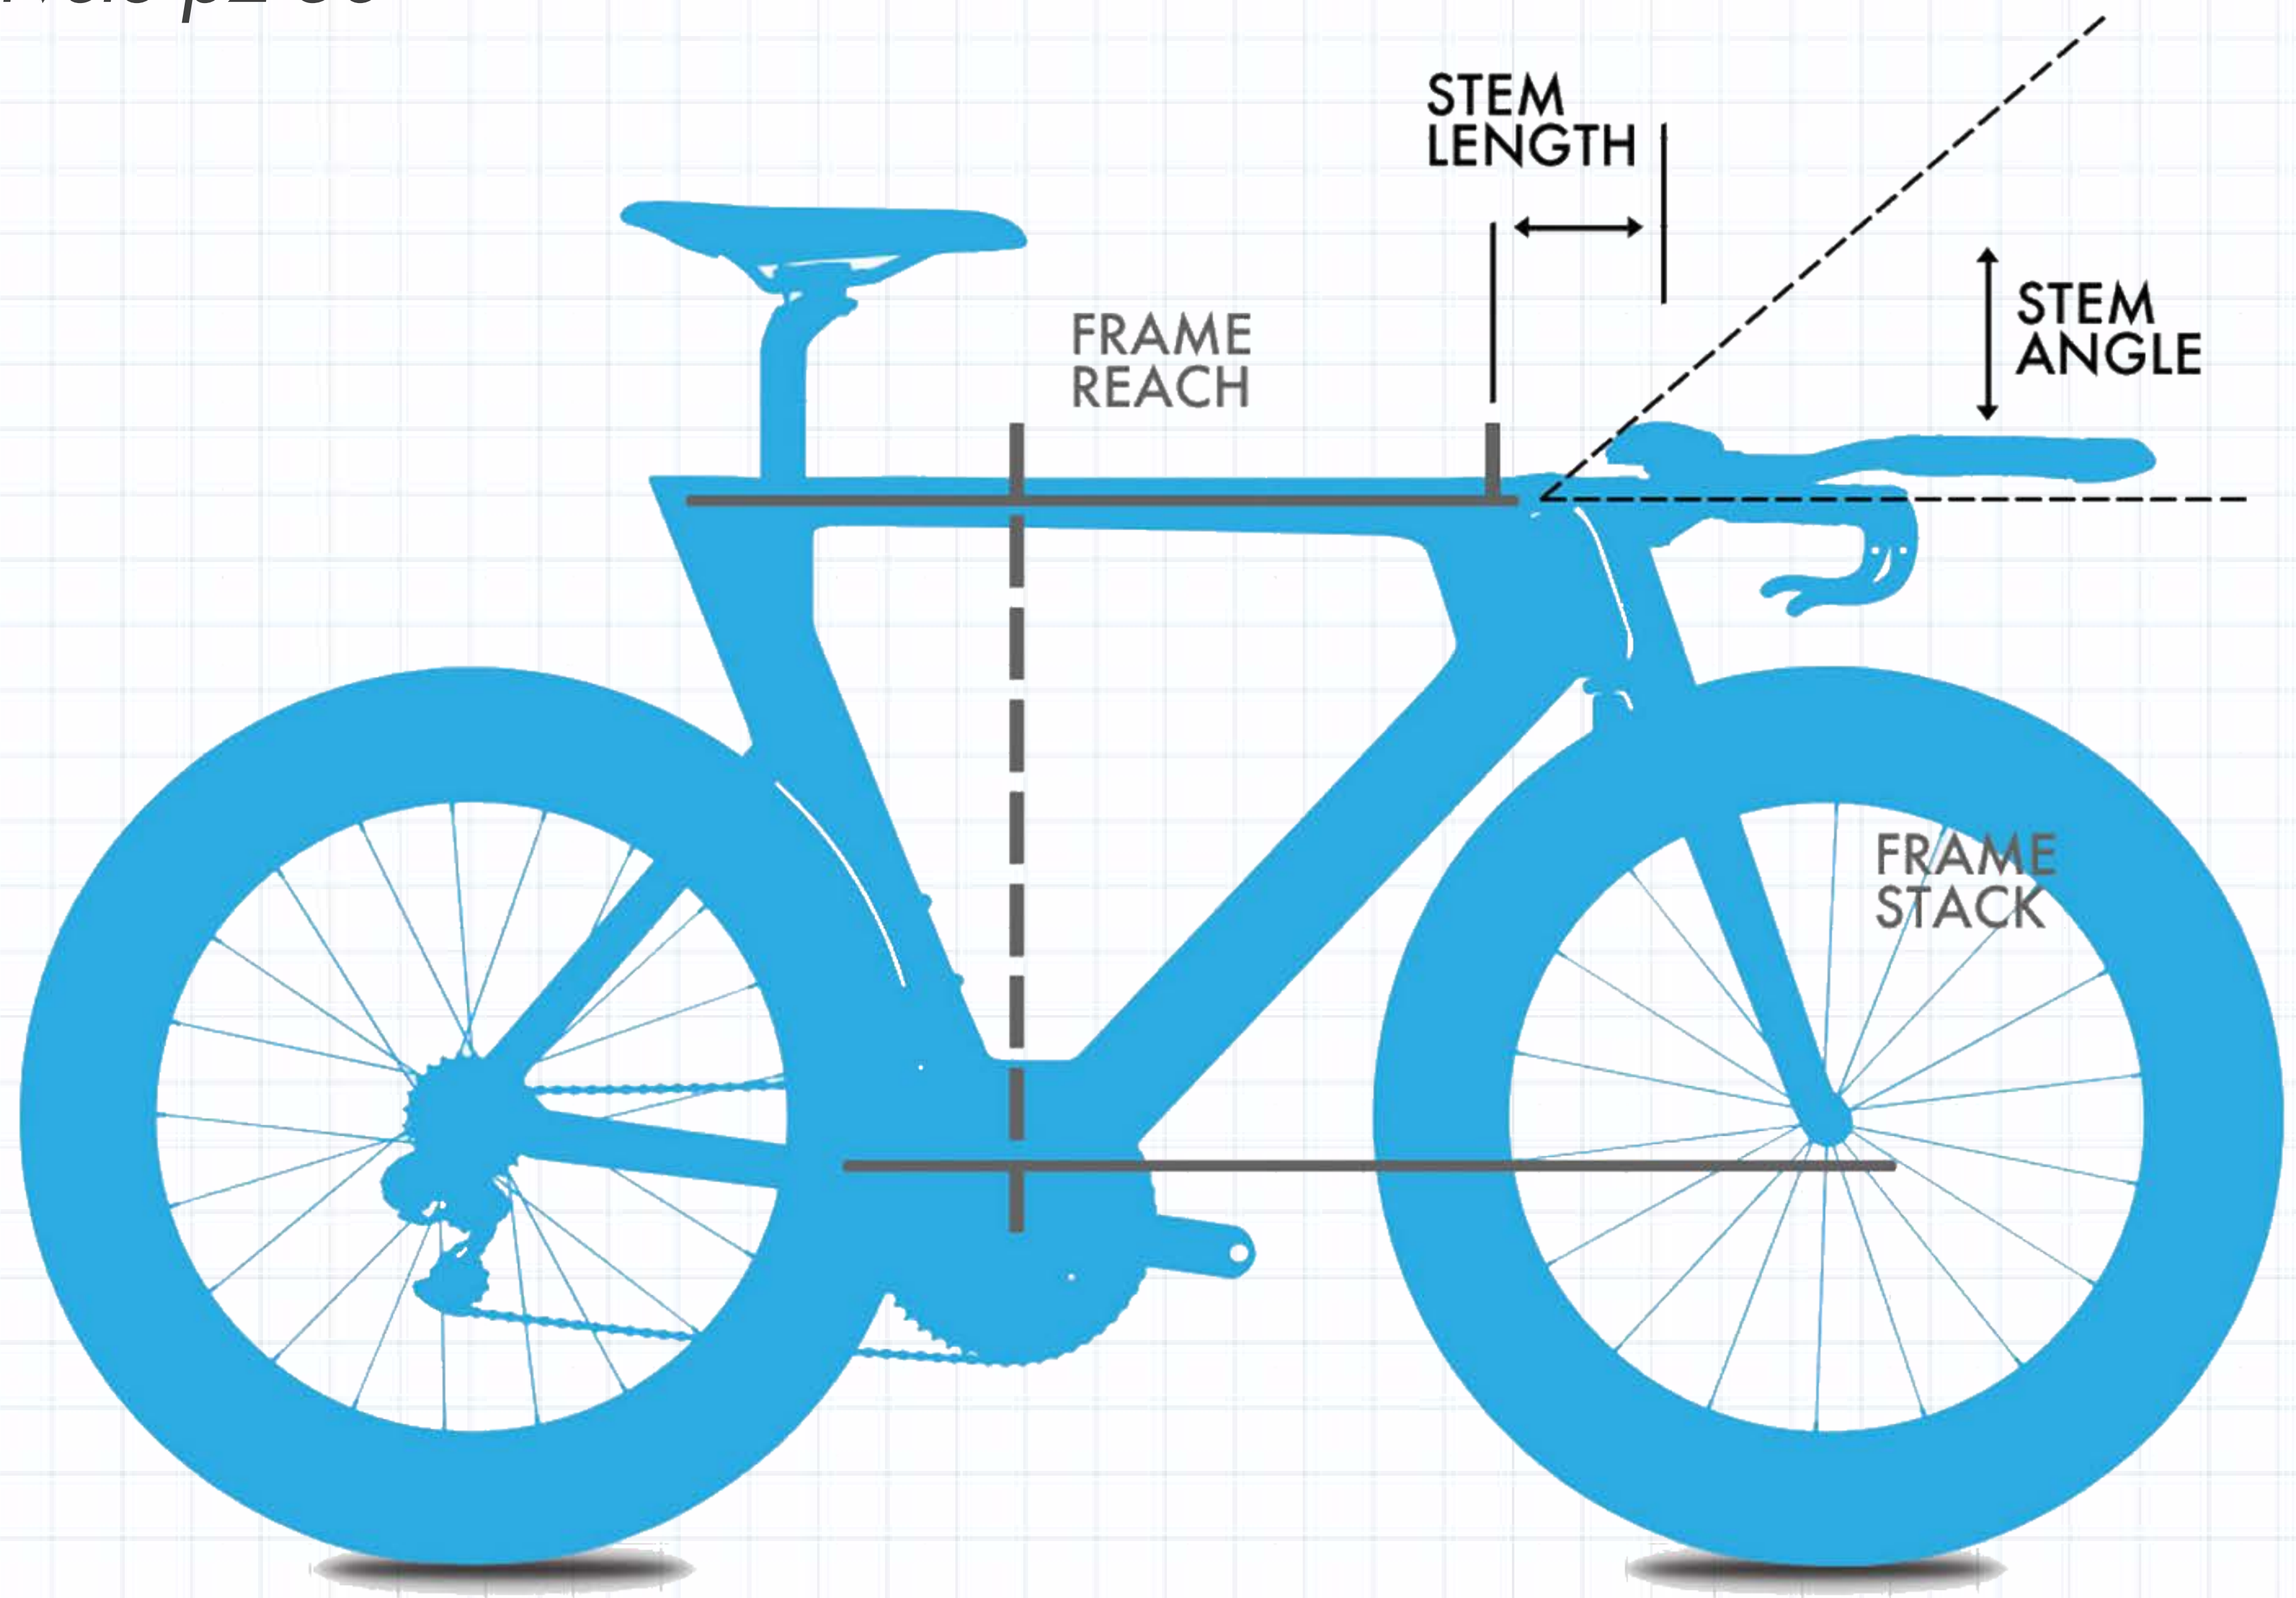


BIKE CONFIGURATION

Stem Length	70 mm
Stem Angle	-6 °
Spacers	15 mm
Frame Reach	425 mm
Frame Stack	540 mm

Fit Name:	Date of fit:	Fit Operator:	Bike Type:	Store Name:
Triathlon Frame Selection	12/10/2019	admin	Triathlon / Time Trial	Onebody 16/9 Hoyle Ave

RECOMMENDED BIKE:

Cervelo p2 54

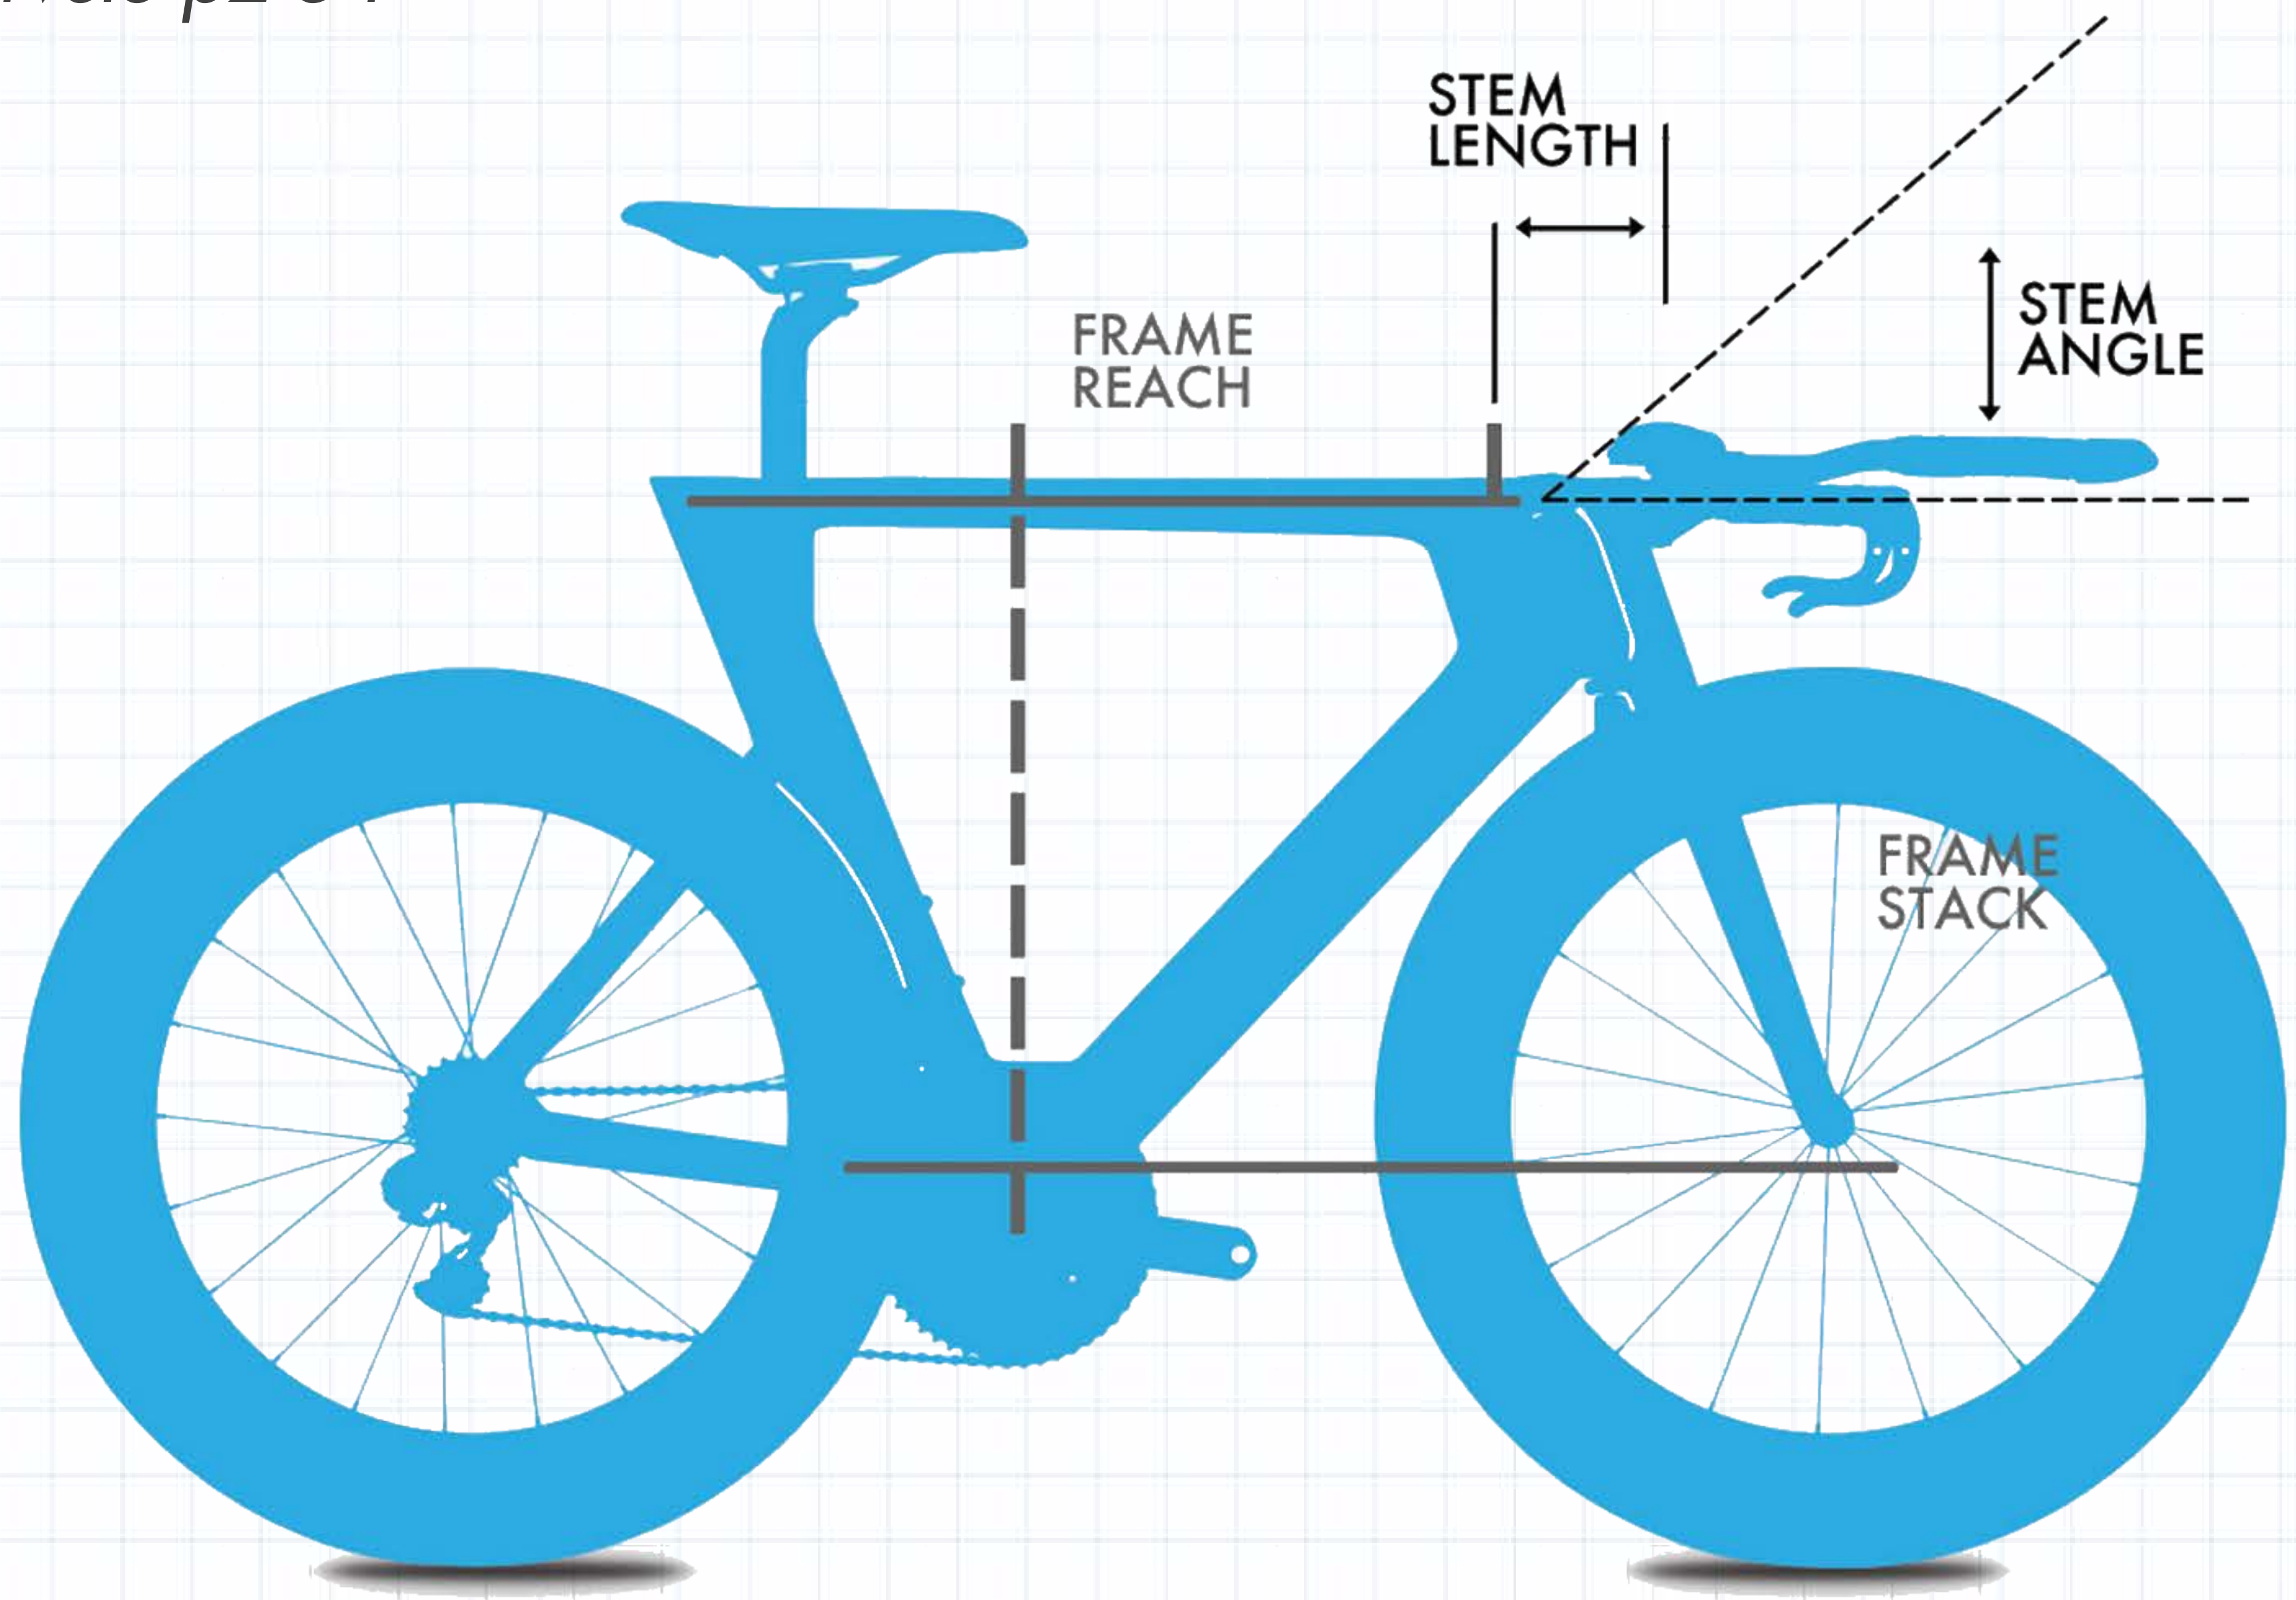


BIKE CONFIGURATION

Stem Length	90 mm
Stem Angle	-6 °
Spacers	30 mm
Frame Reach	411 mm
Frame Stack	522 mm

Fit Name:	Date of fit:	Fit Operator:	Bike Type:	Store Name:
Triathlon Frame Selection	12/10/2019	admin	Triathlon / Time Trial	Onebody 16/9 Hoyle Ave

RECOMMENDED BIKE:

Parlee TTiR M

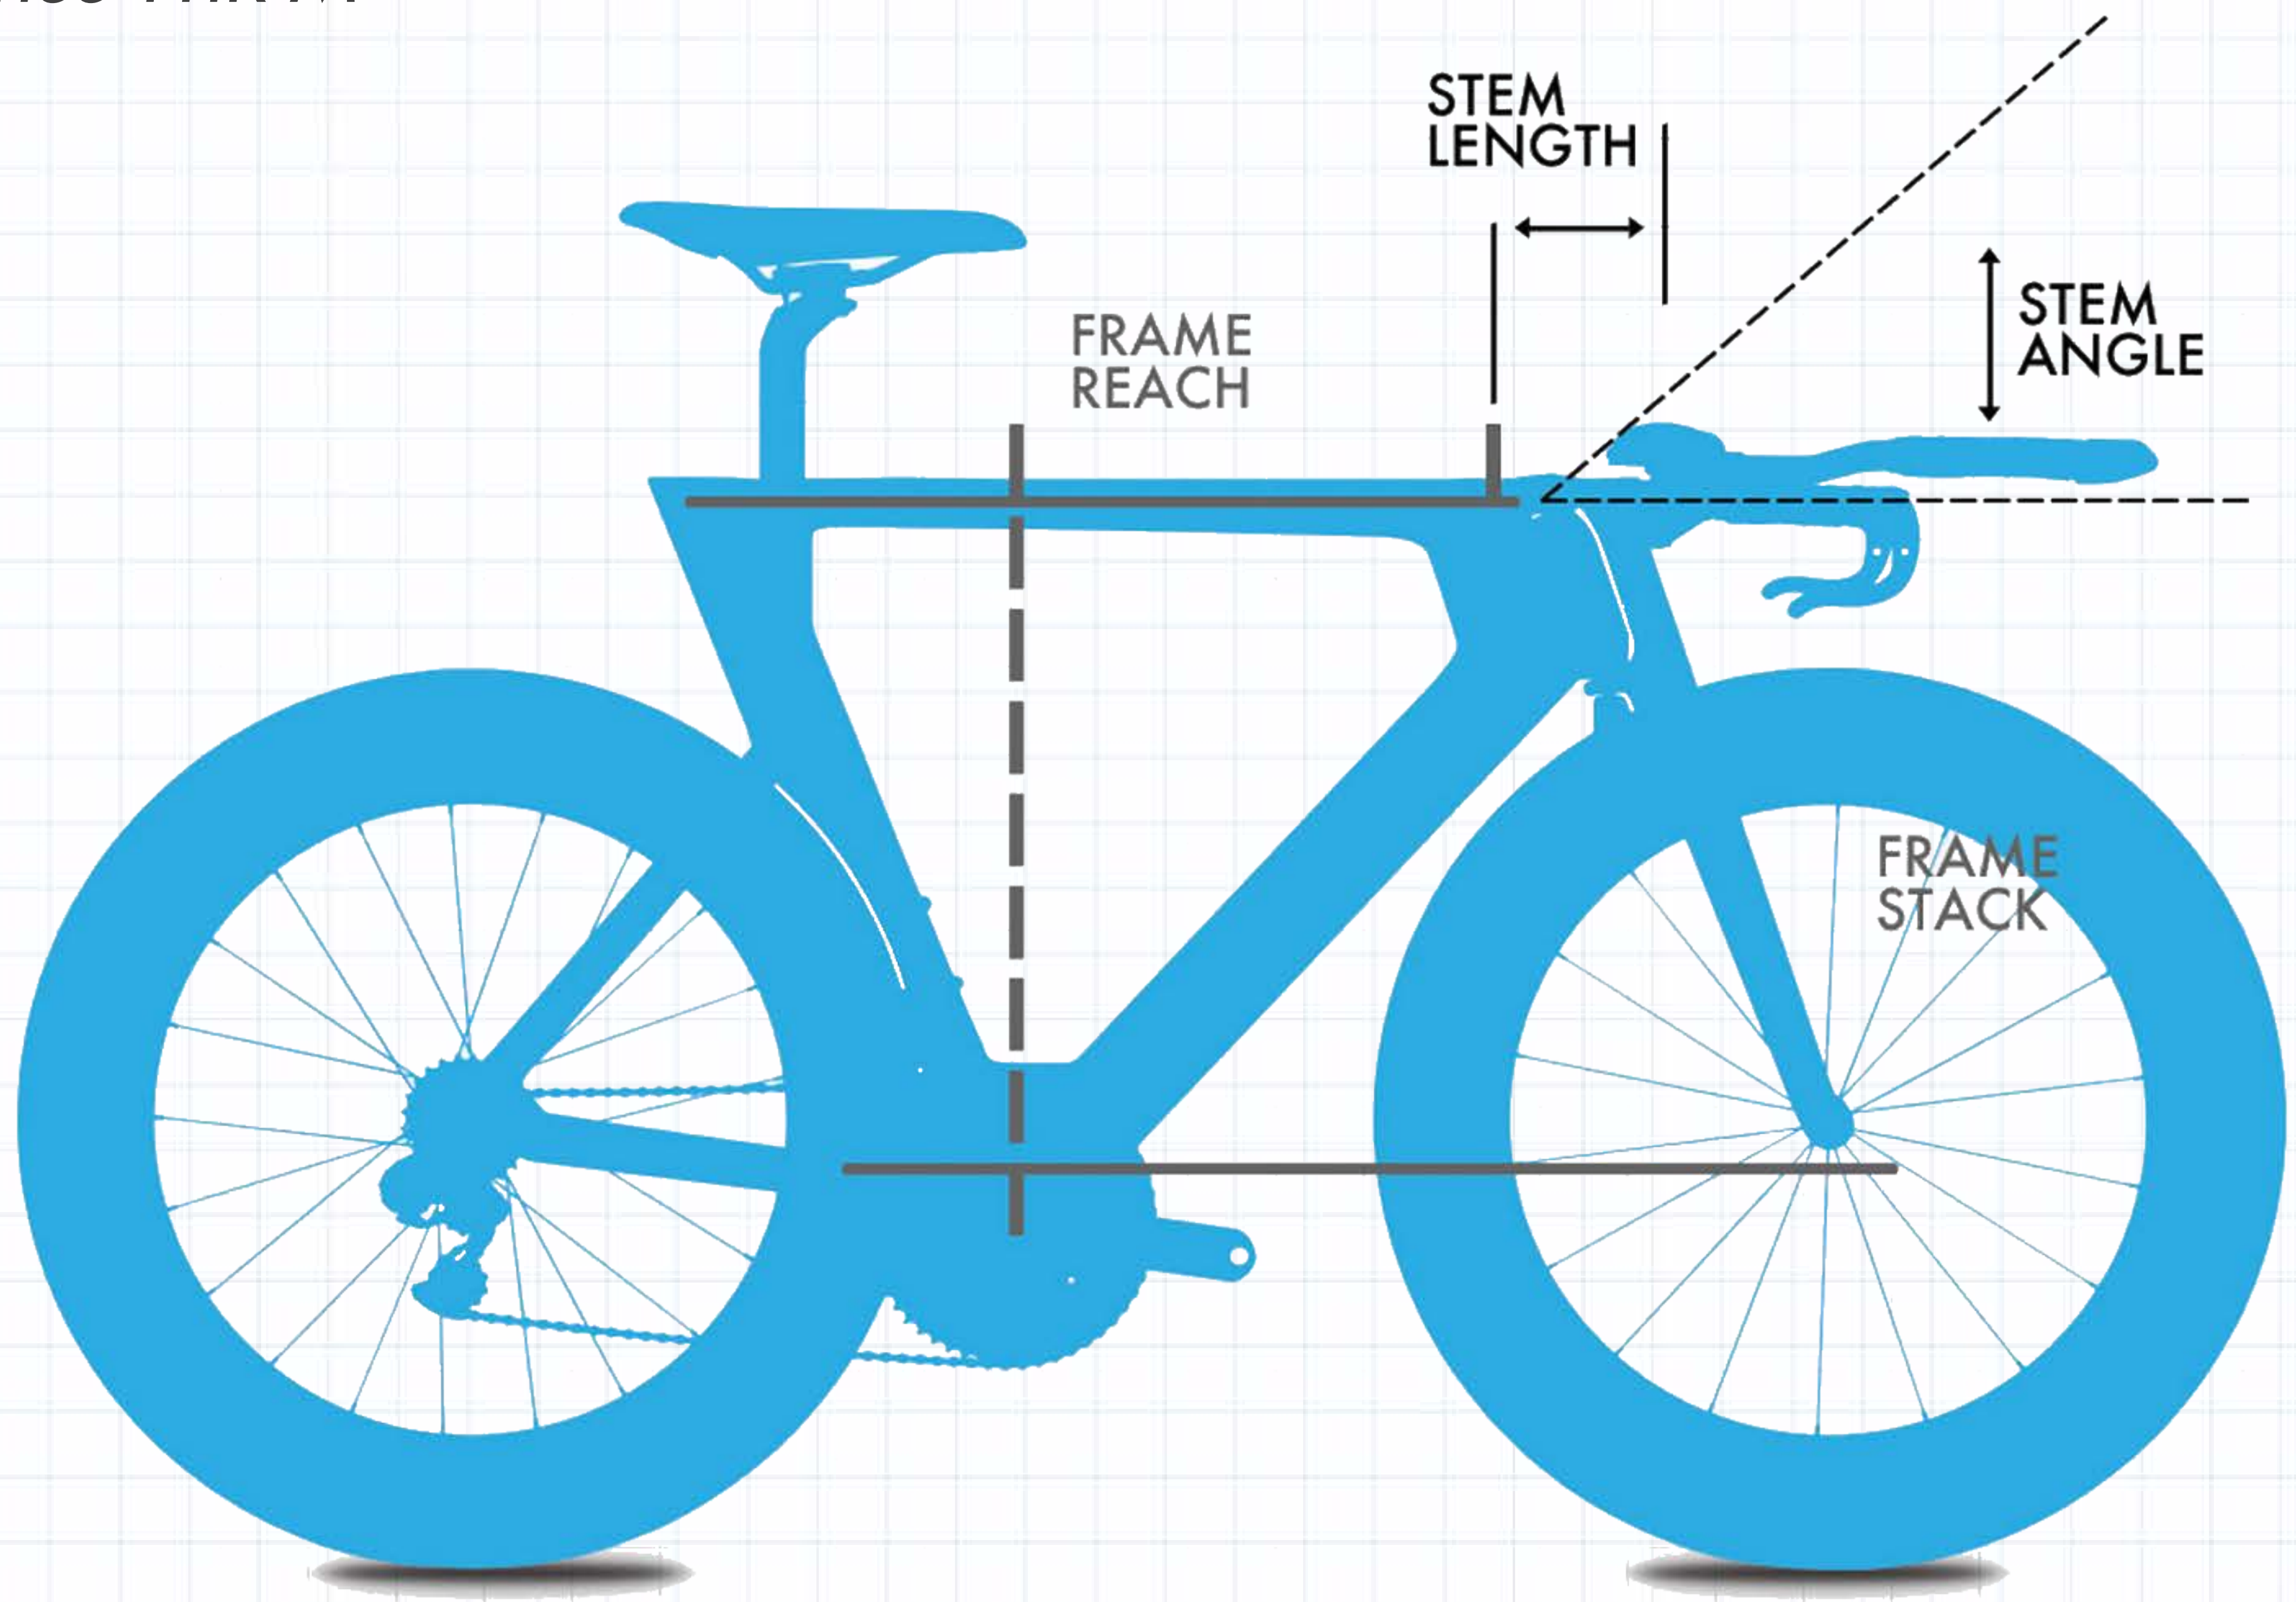


BIKE CONFIGURATION

Stem Length	100 mm
Stem Angle	-6 °
Spacers	45 mm
Frame Reach	407 mm
Frame Stack	505 mm

Fit Name:	Date of fit:	Fit Operator:	Bike Type:	Store Name:
Triathlon Frame Selection	12/10/2019	admin	Triathlon / Time Trial	Onebody 16/9 Hoyle Ave

RECOMMENDED BIKE:

Specialized Shiv (Expert / Elite) M

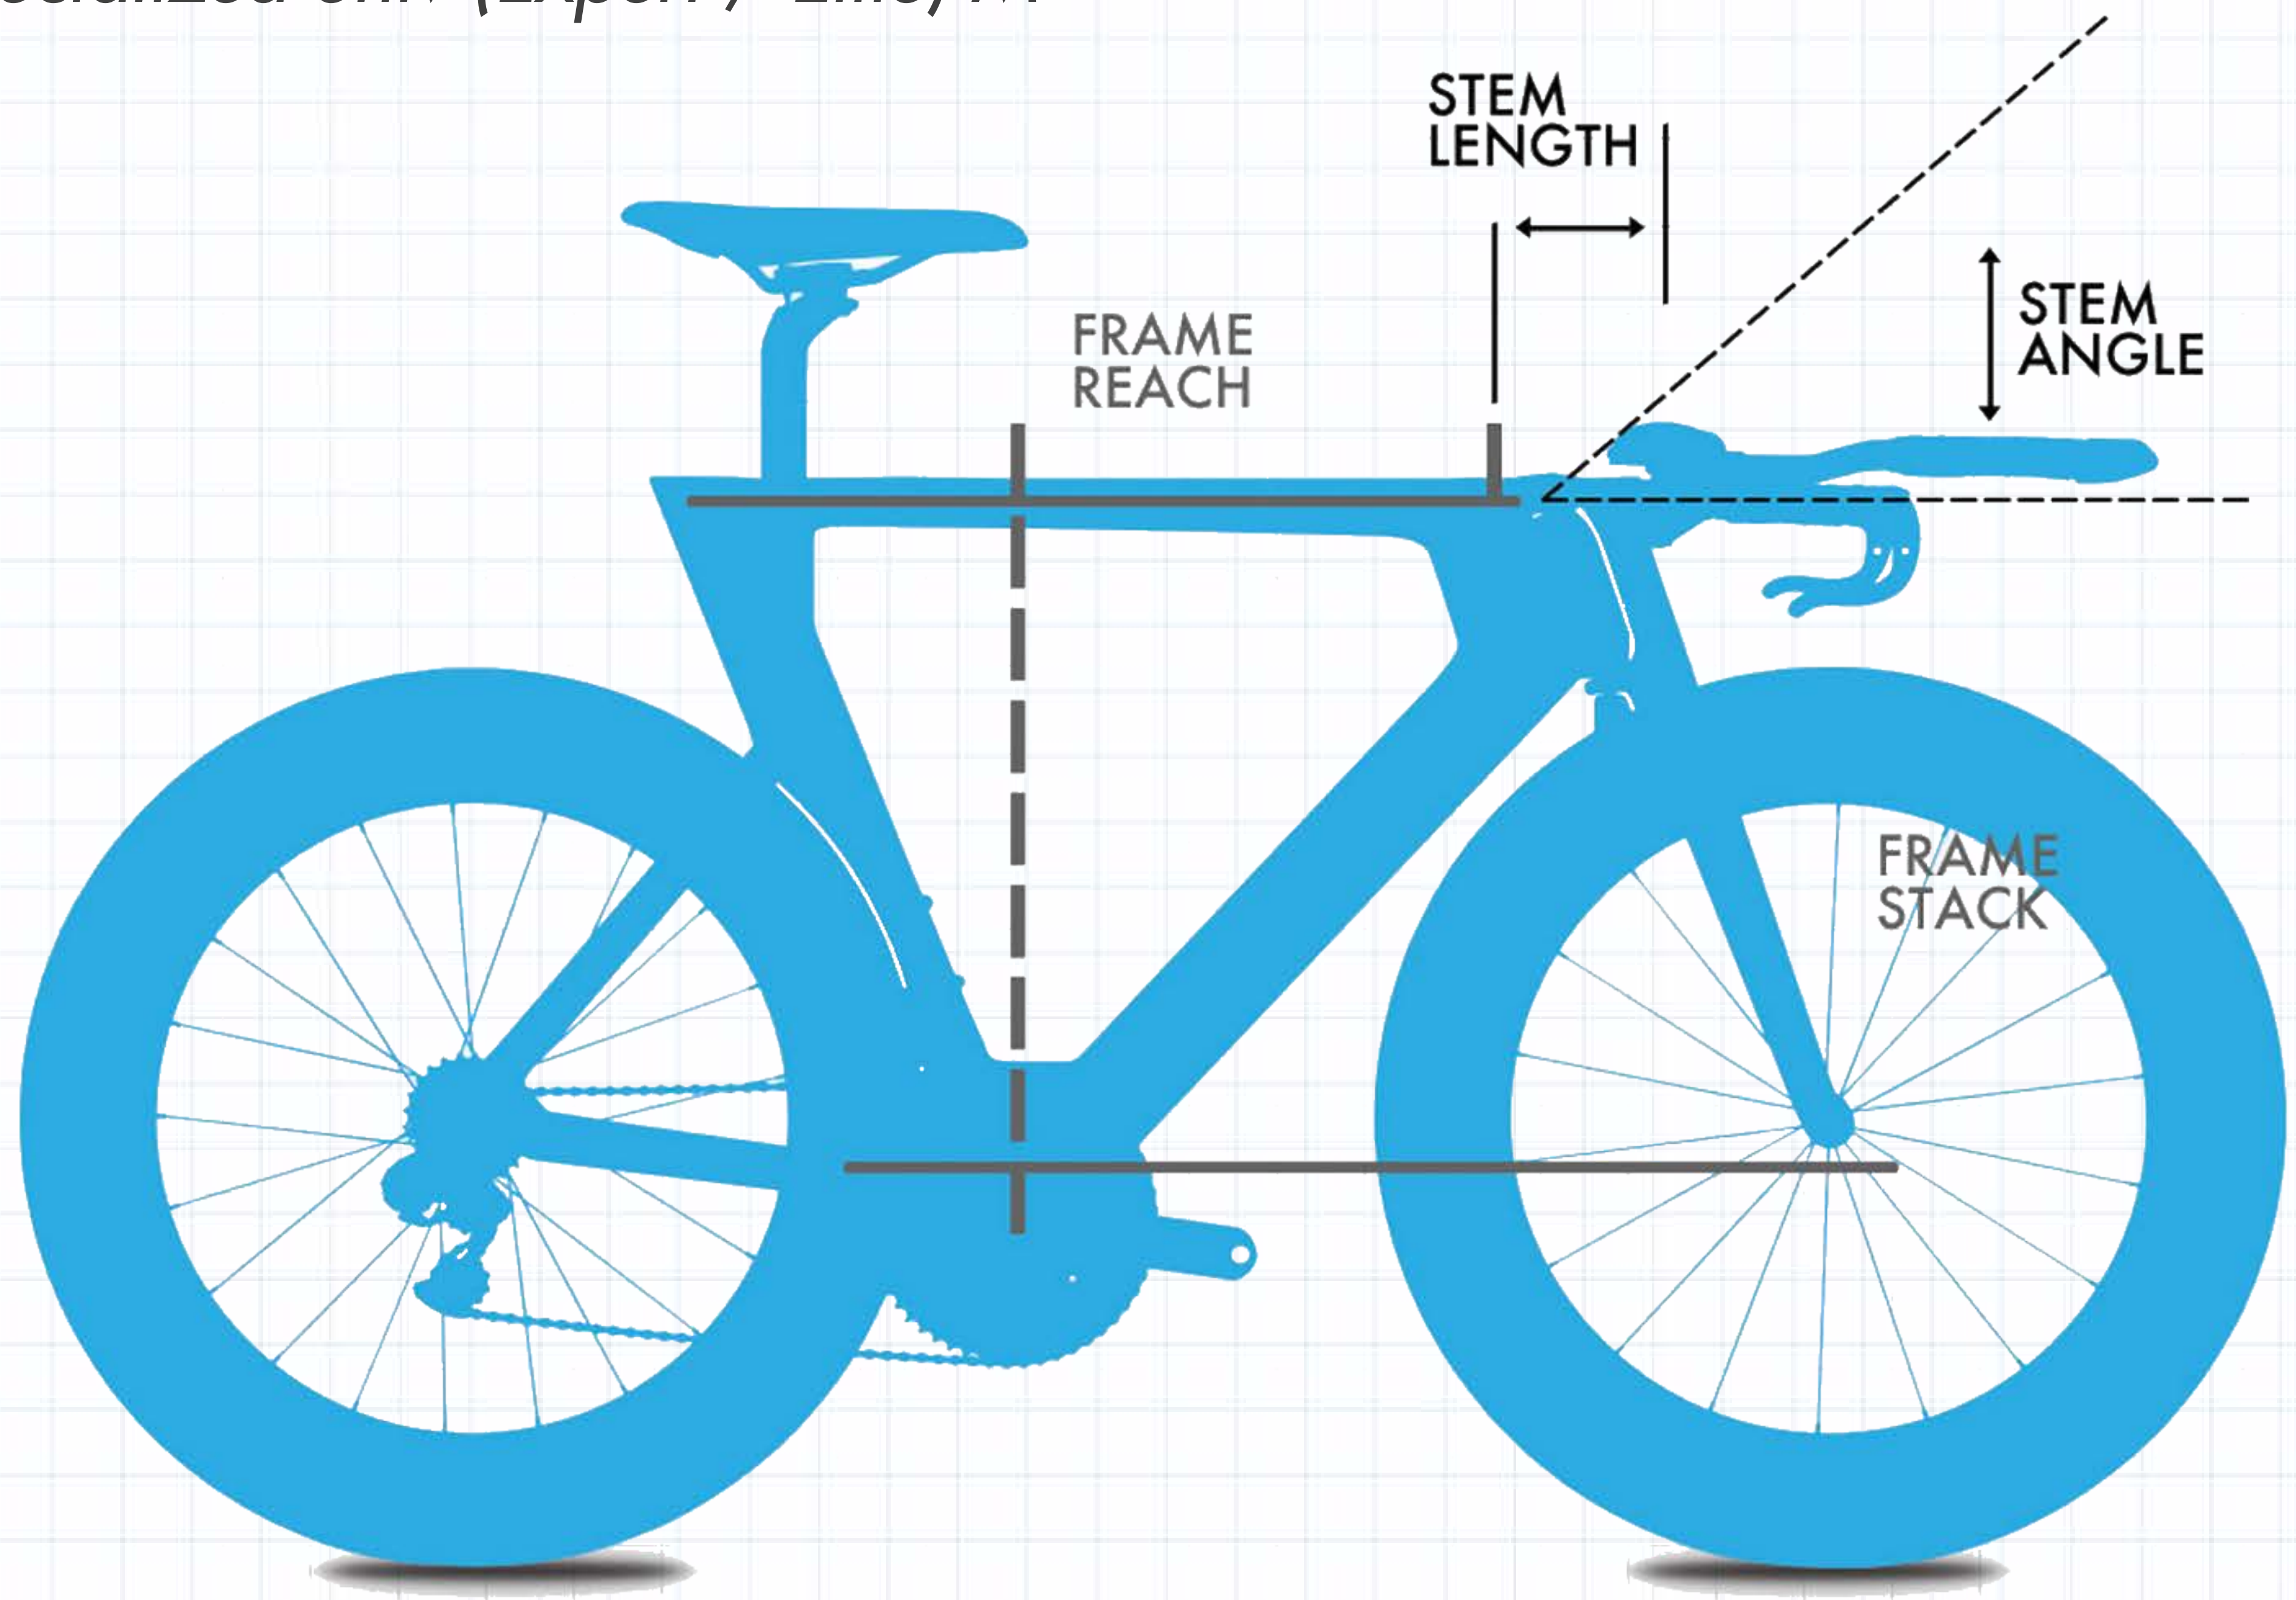


BIKE CONFIGURATION

Stem Length	90 mm
Stem Angle	-6 °
Spacers	10 mm
Frame Reach	405 mm
Frame Stack	540 mm

Fit Name:	Date of fit:	Fit Operator:	Bike Type:	Store Name:
Triathlon Frame Selection	12/10/2019	admin	Triathlon / Time Trial	Onebody 16/9 Hoyle Ave

RECOMMENDED BIKE:

Trek Speed Concept M

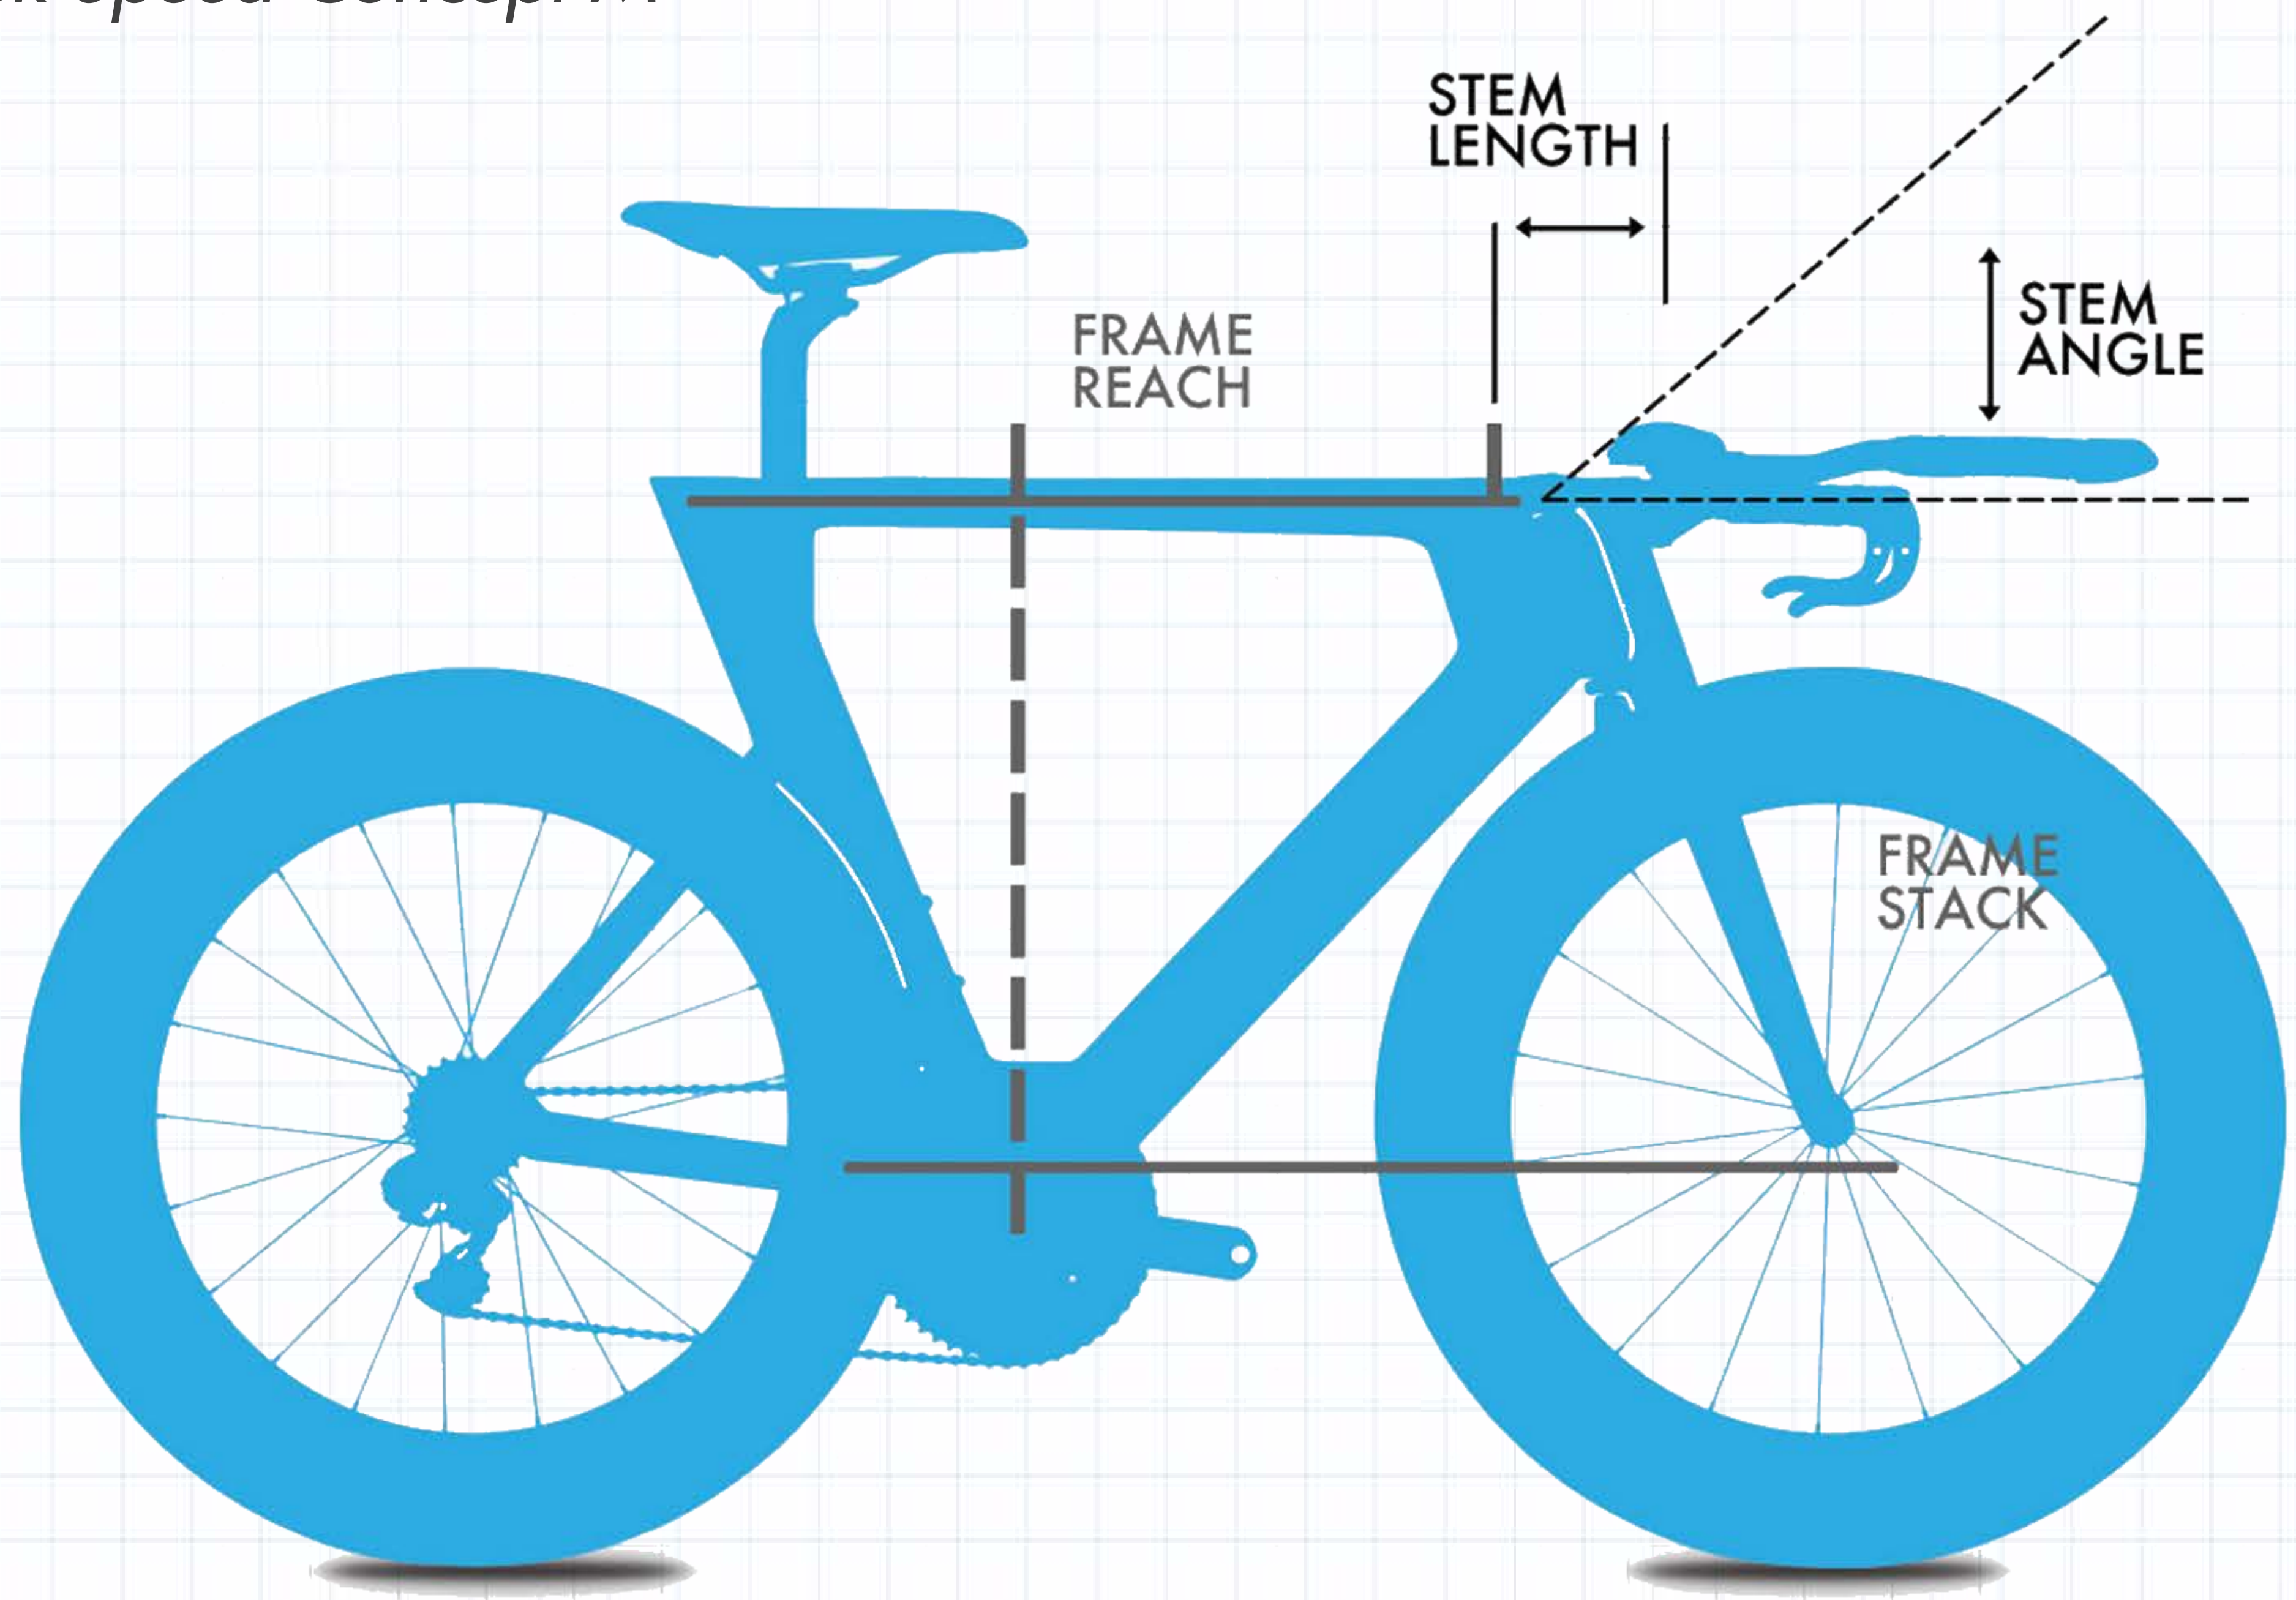

BIKE CONFIGURATION

Stem Length	100 mm
Stem Angle	-17 °
Spacers	50 mm
Frame Reach	408 mm
Frame Stack	517 mm

Fit Name:	Date of fit:	Fit Operator:	Bike Type:	Store Name:
Triathlon Frame Selection	12/10/2019	admin	Triathlon / Time Trial	Onebody 16/9 Hoyle Ave

MEASUREMENT INSTRUCTIONS:

How to measure fit data coordinates

STEP
1


SADDLE HEIGHT



Measure from top of saddle at middle diagonally down to the center of the bottom bracket.

STEP
2

SADDLE SET BACK

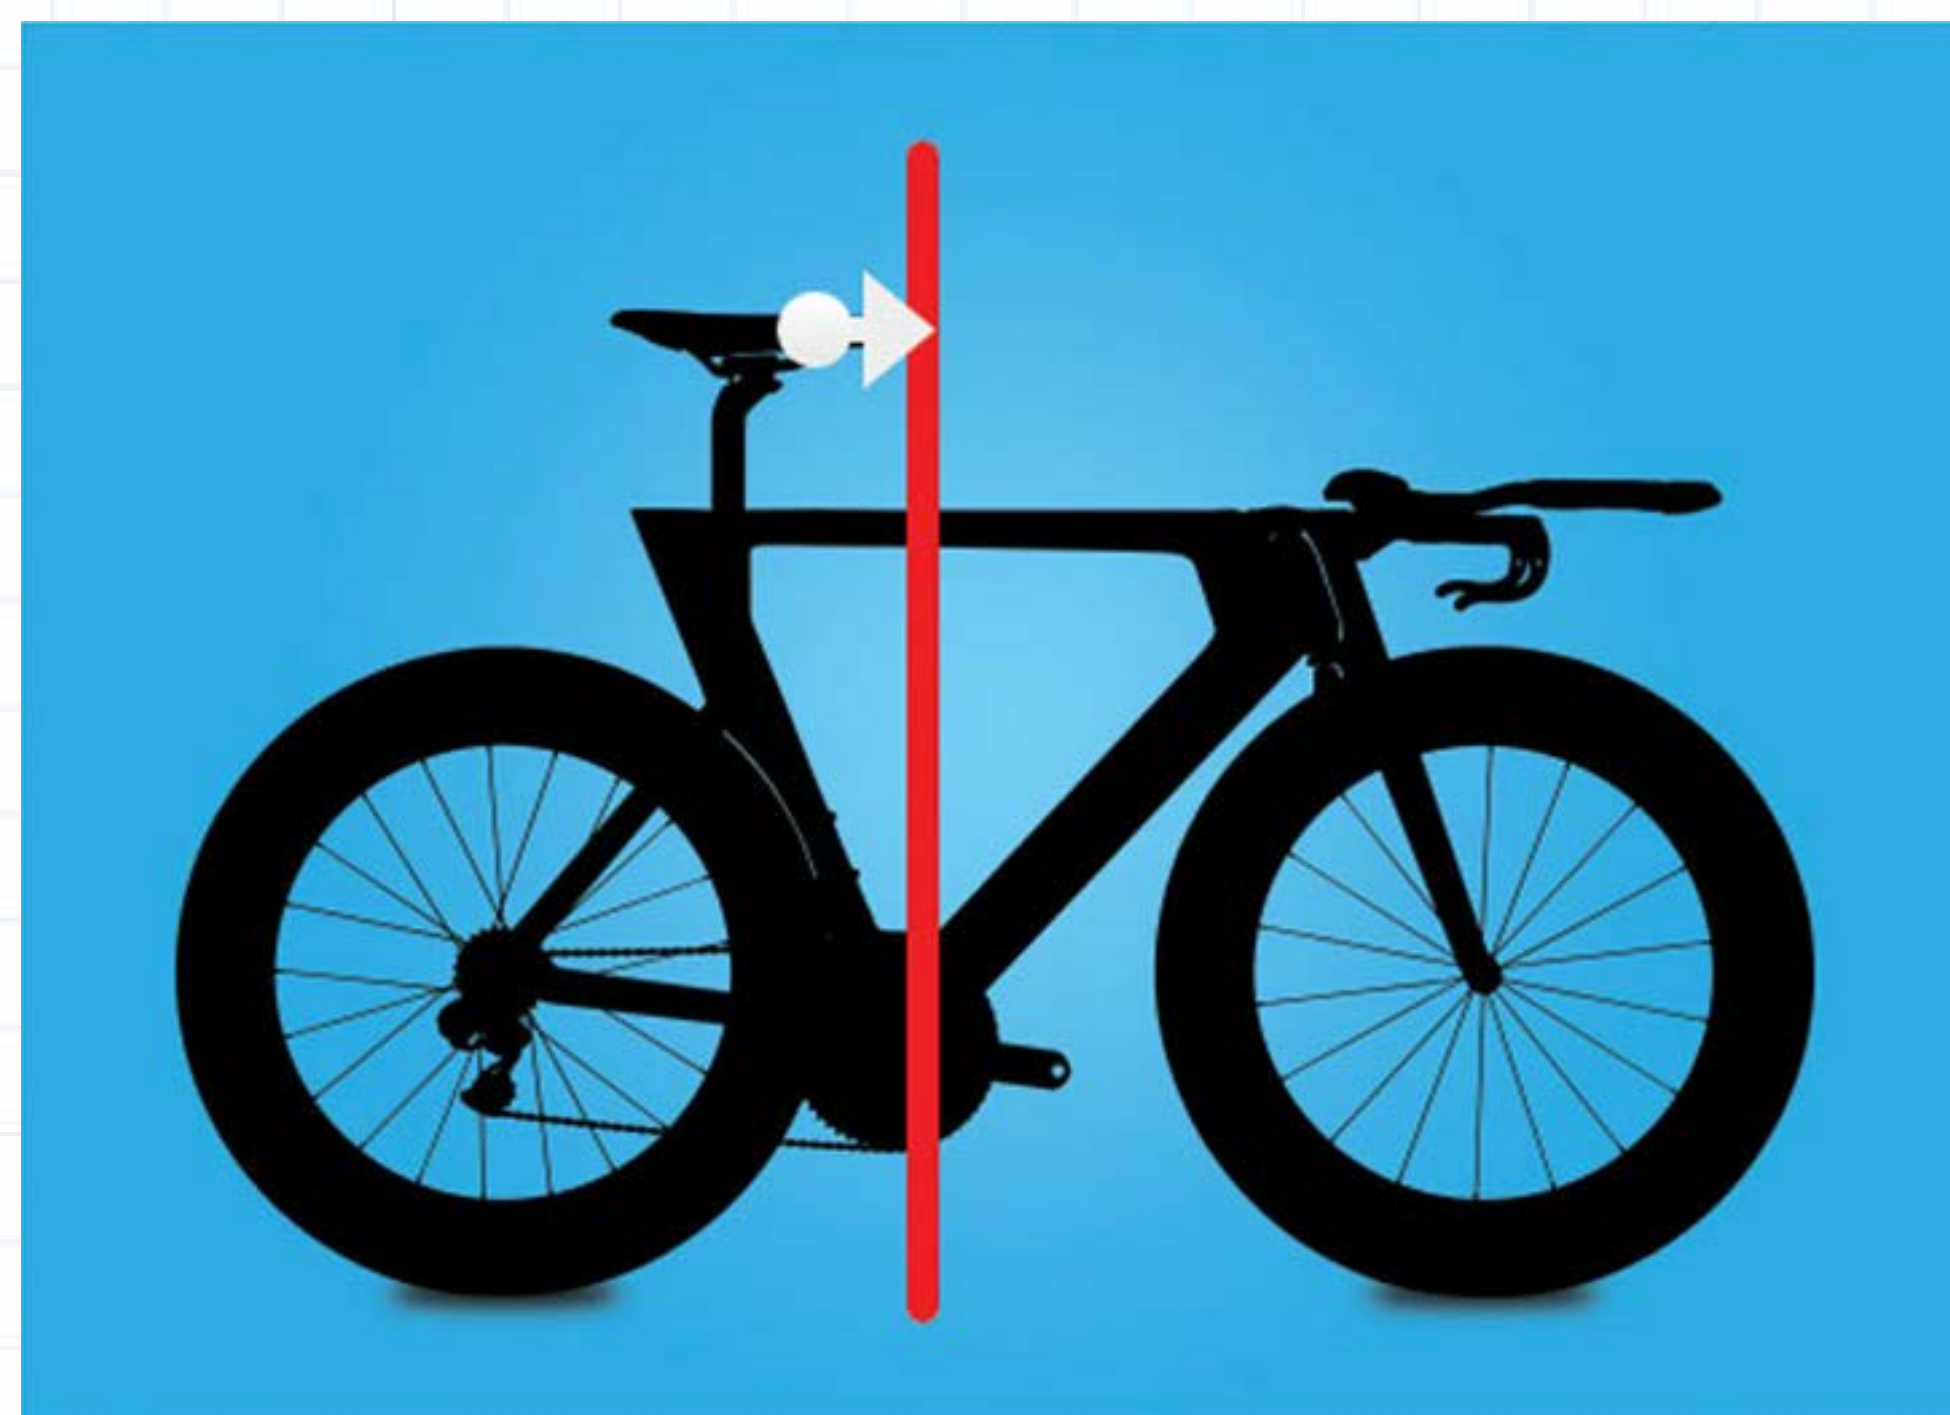

Measure from nose of saddle horizontally to vertical laser line.

STEP
3


REACH FROM SADDLE TO BARS



Measure from nose of saddle to end of aero extension.

STEP
4

DROP FROM SADDLE TO BARS

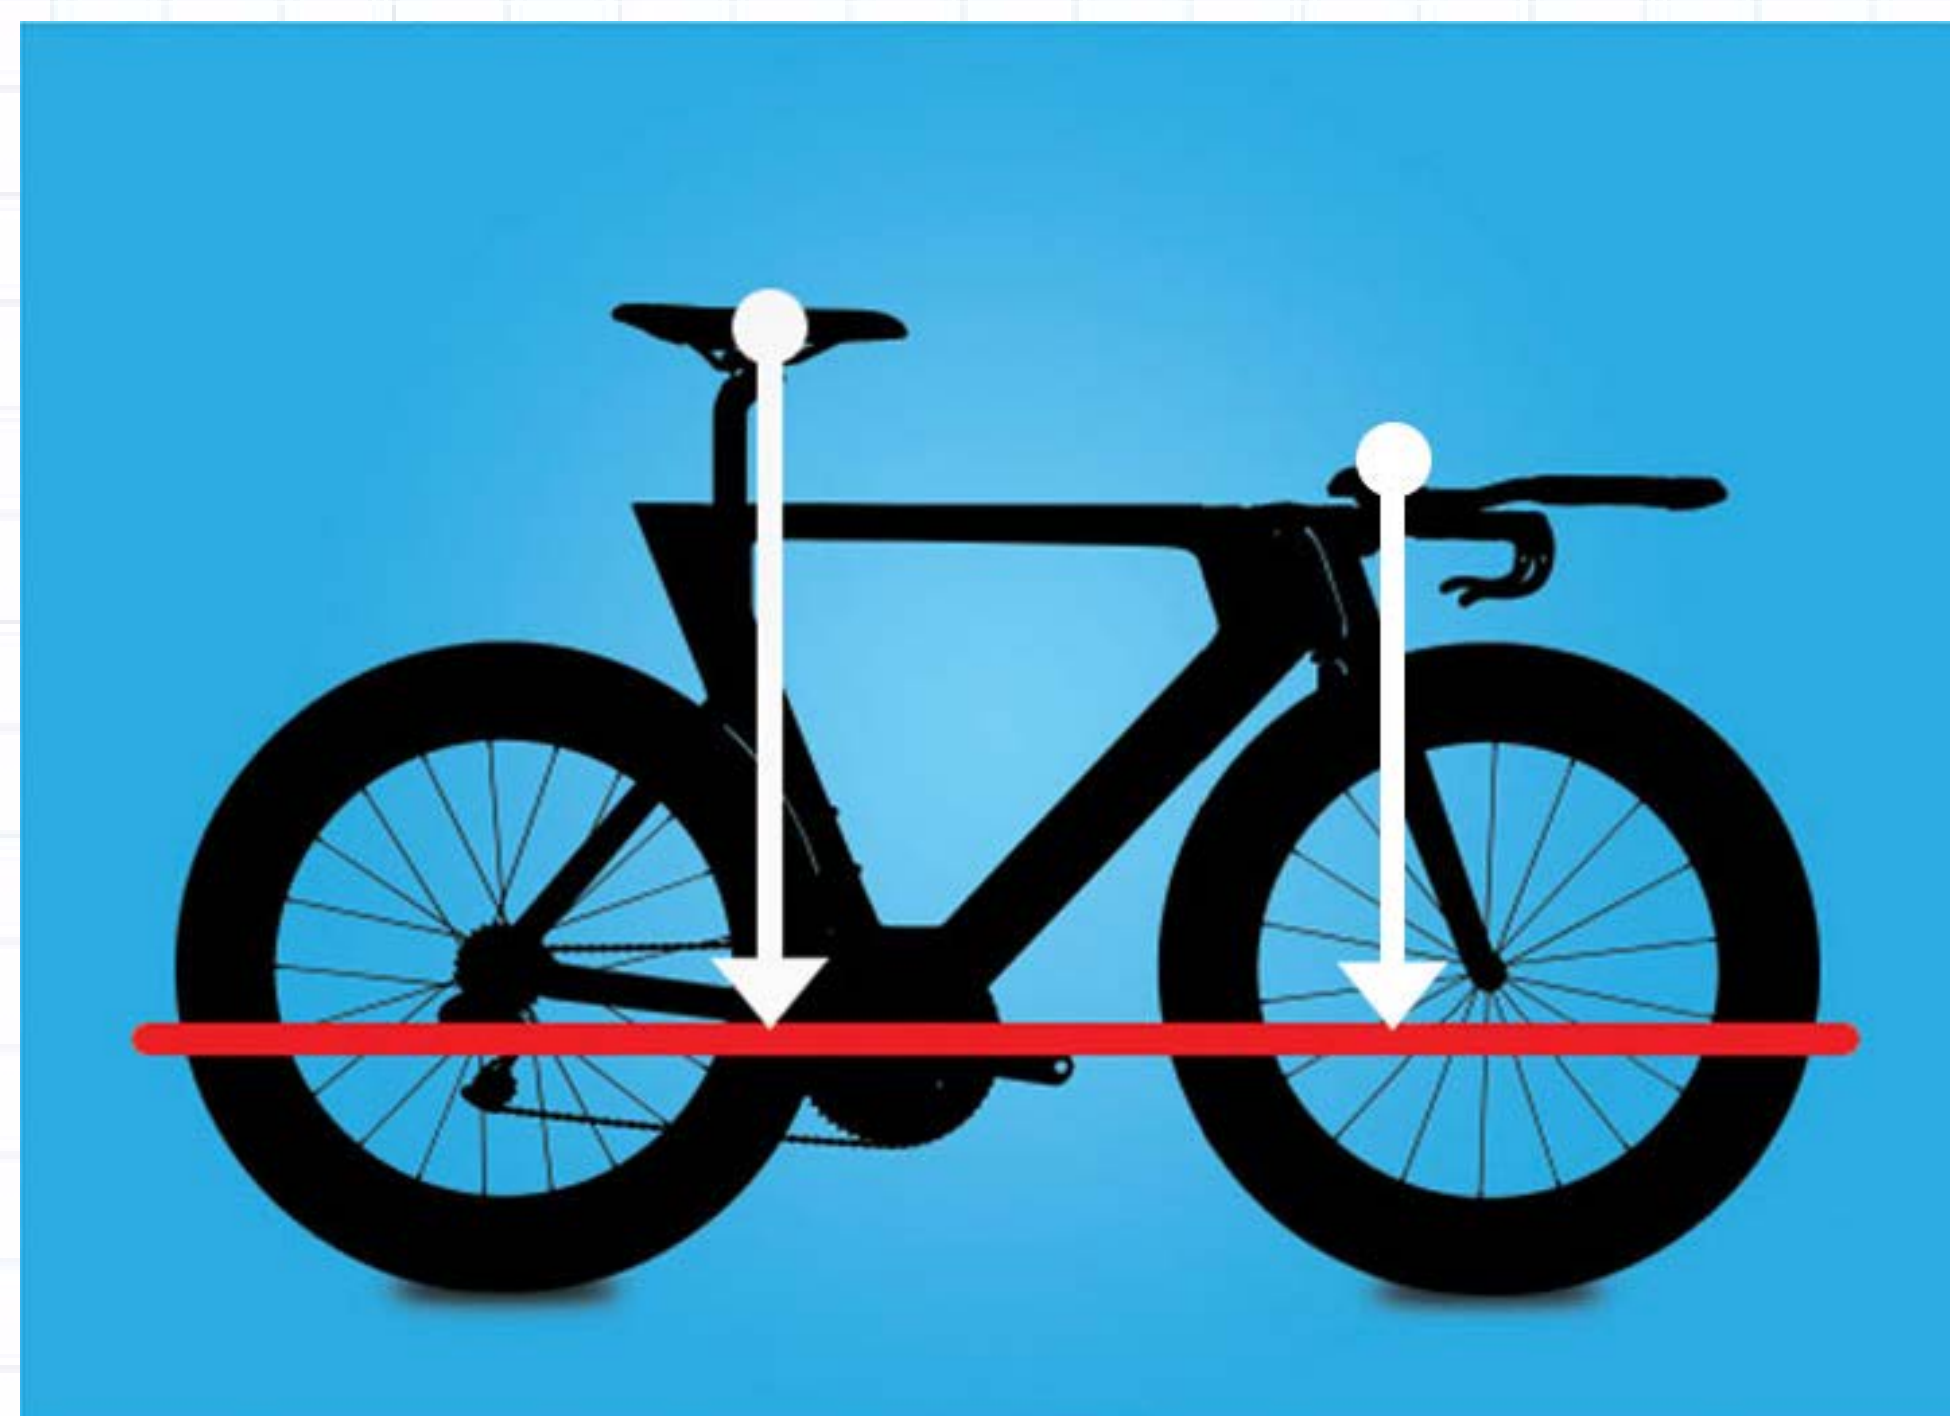

Measure from top of saddle at middle to horizontal laser line. Measure from middle of pad to horizontal laser line. The saddle measurement minus the pad measurement will equal drop.

Fit Name:
Triathlon Frame Selection

Date of fit:
12/10/2019

Fit Operator:
admin

Bike Type:
Triathlon / Time Trial


Store Name:
Onebody
16/9 Hoyle Ave

MEASUREMENT INSTRUCTIONS:

The **SX**, **SY**, **HX** and **HY** coordinates represent the saddle and handlebar coordinates from your final position based upon their position in relation to the center of the bottom bracket.

STEP
1


SY

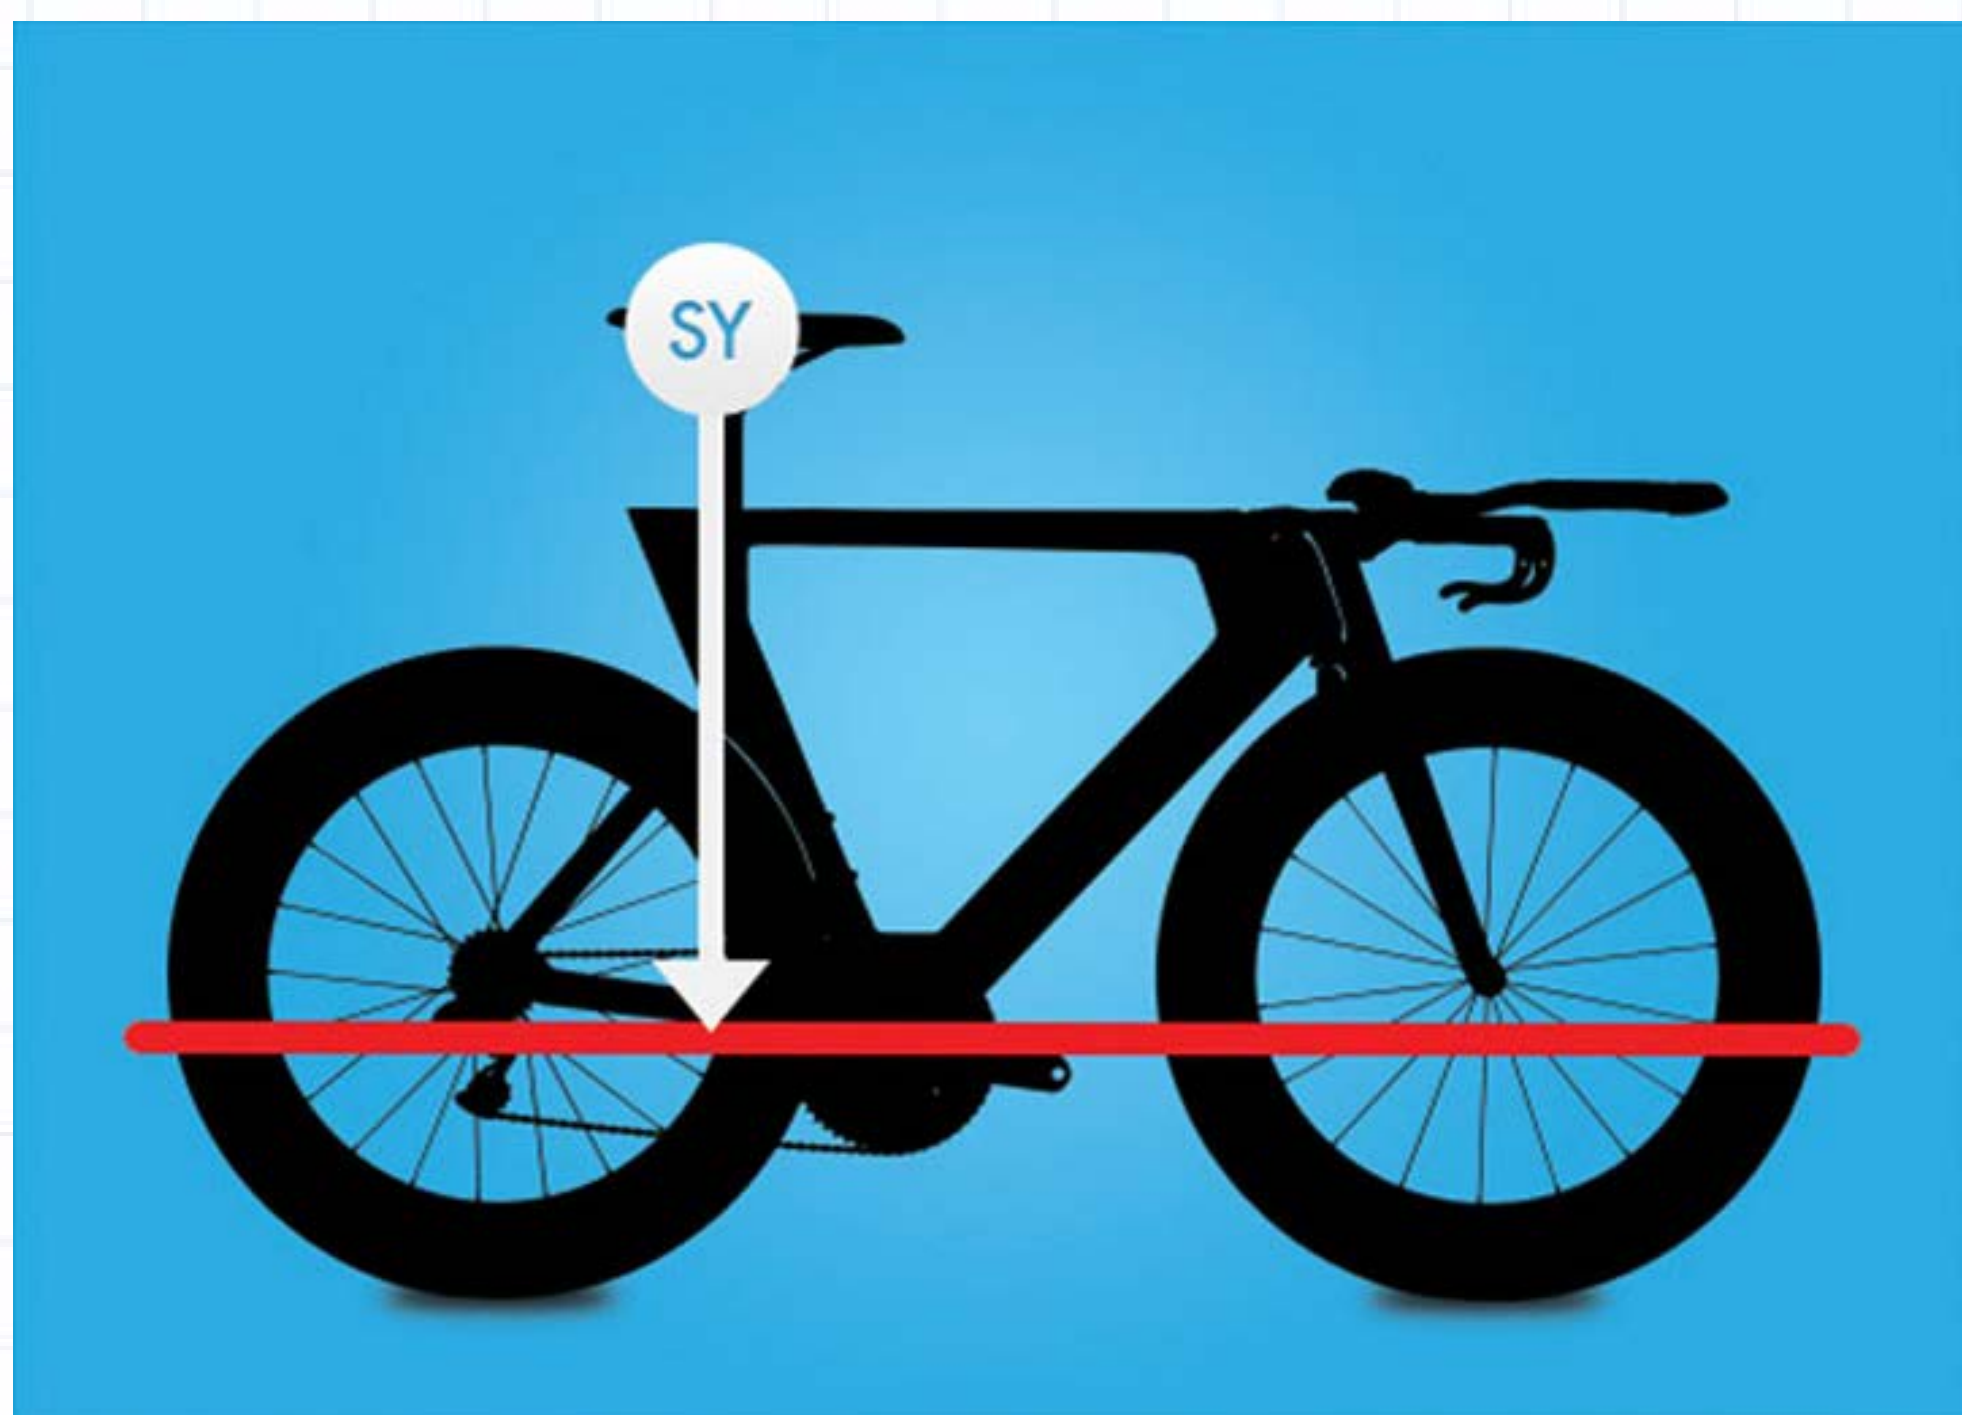

SY is the distance from middle of saddle rail to horizontal laser line.

STEP
2


SX

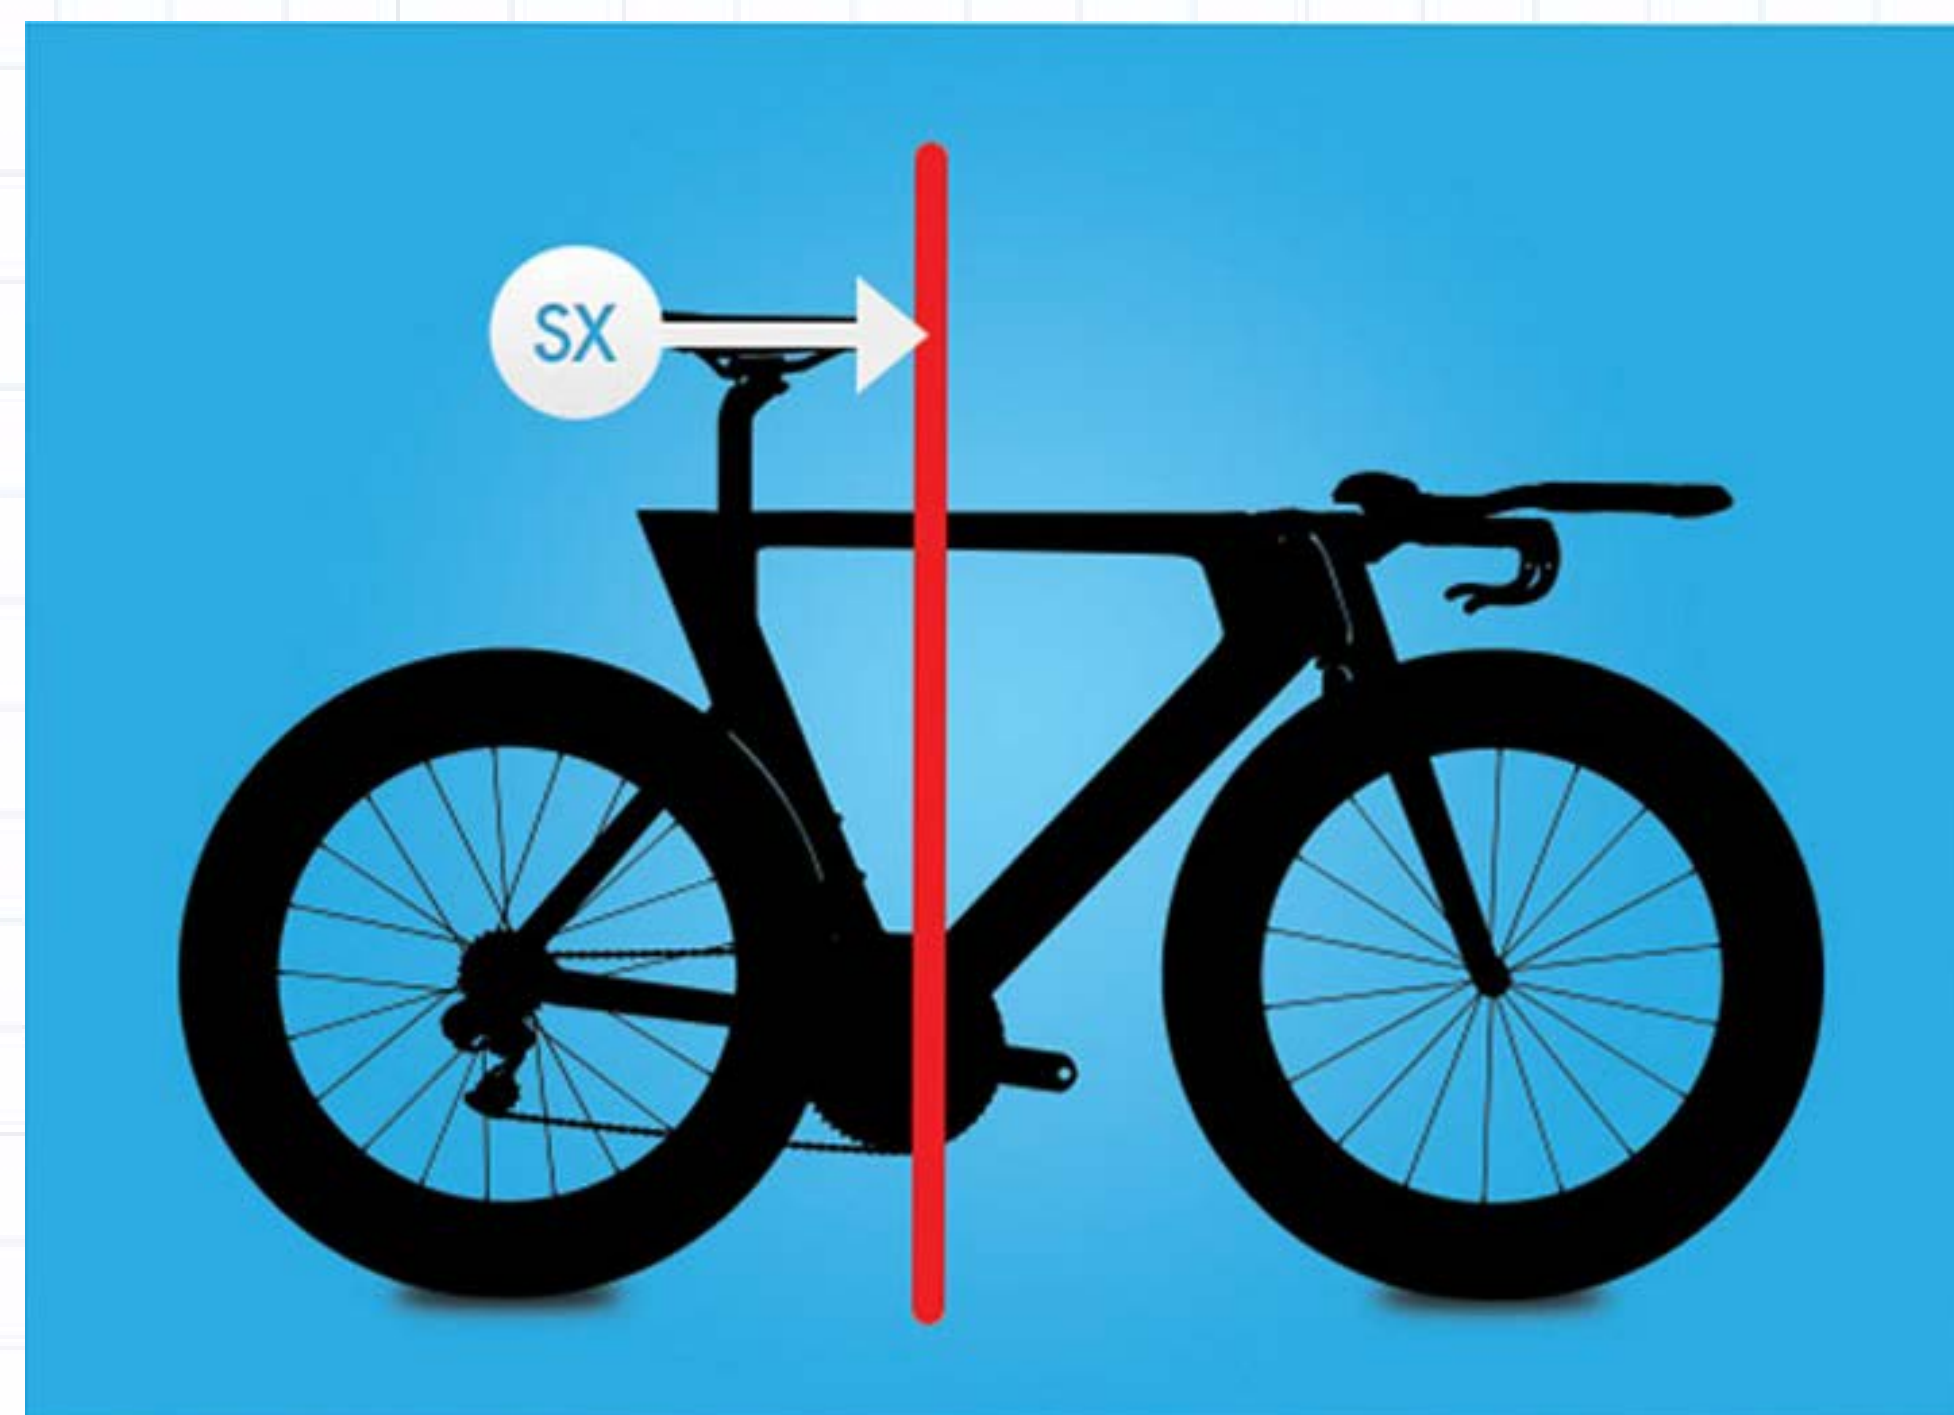

SX is the distance from middle of saddle rail to vertical laser line.

STEP
3


HX

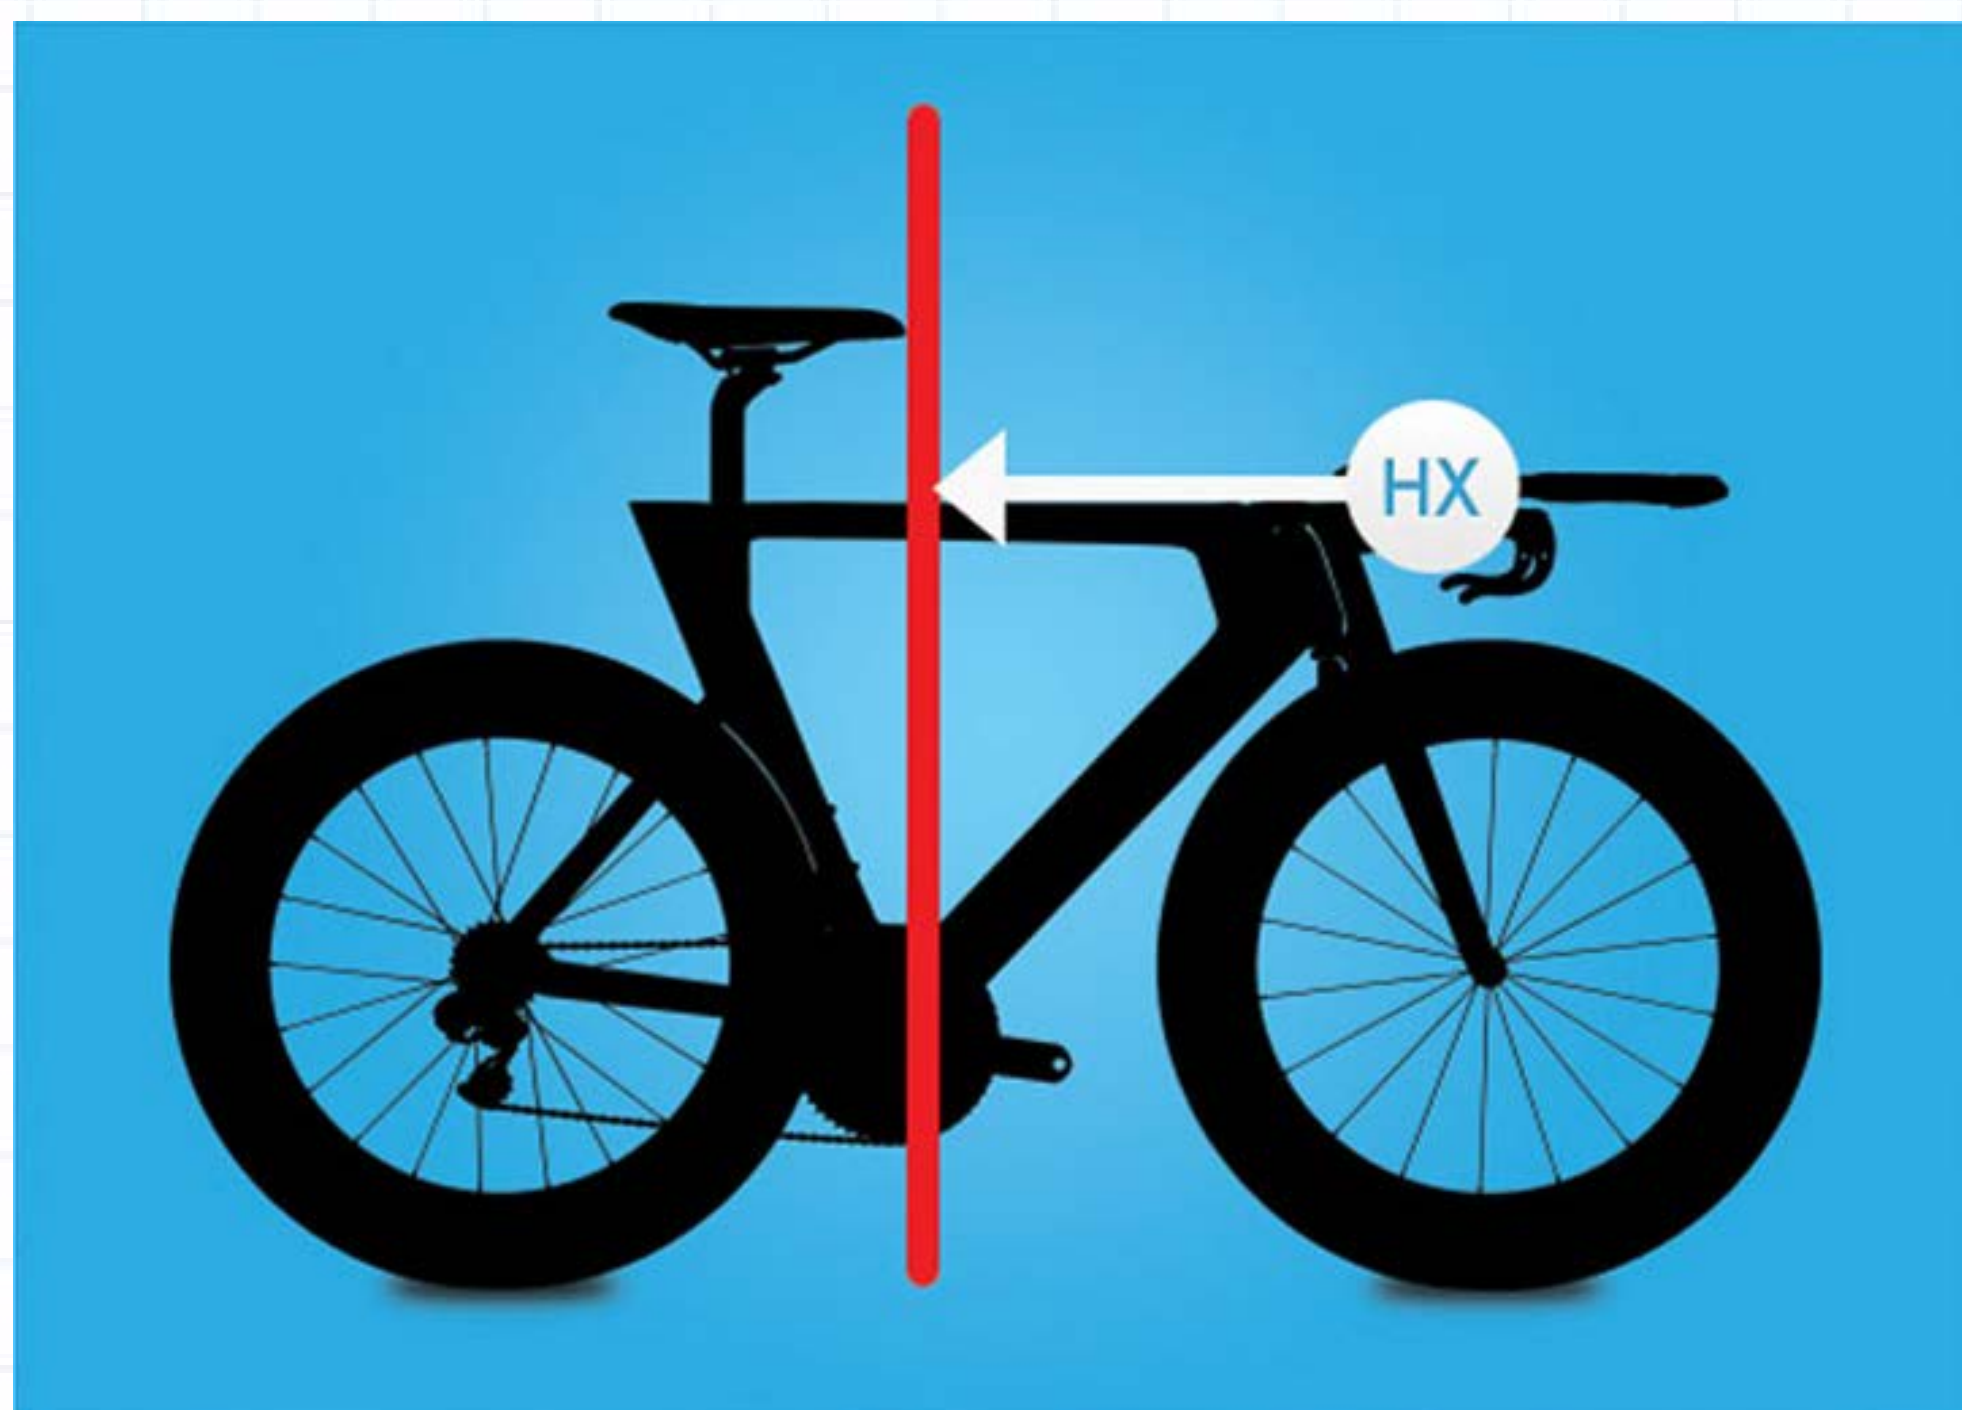

HX is the distance from the middle of handlebar to vertical laser line.

STEP
4

HY

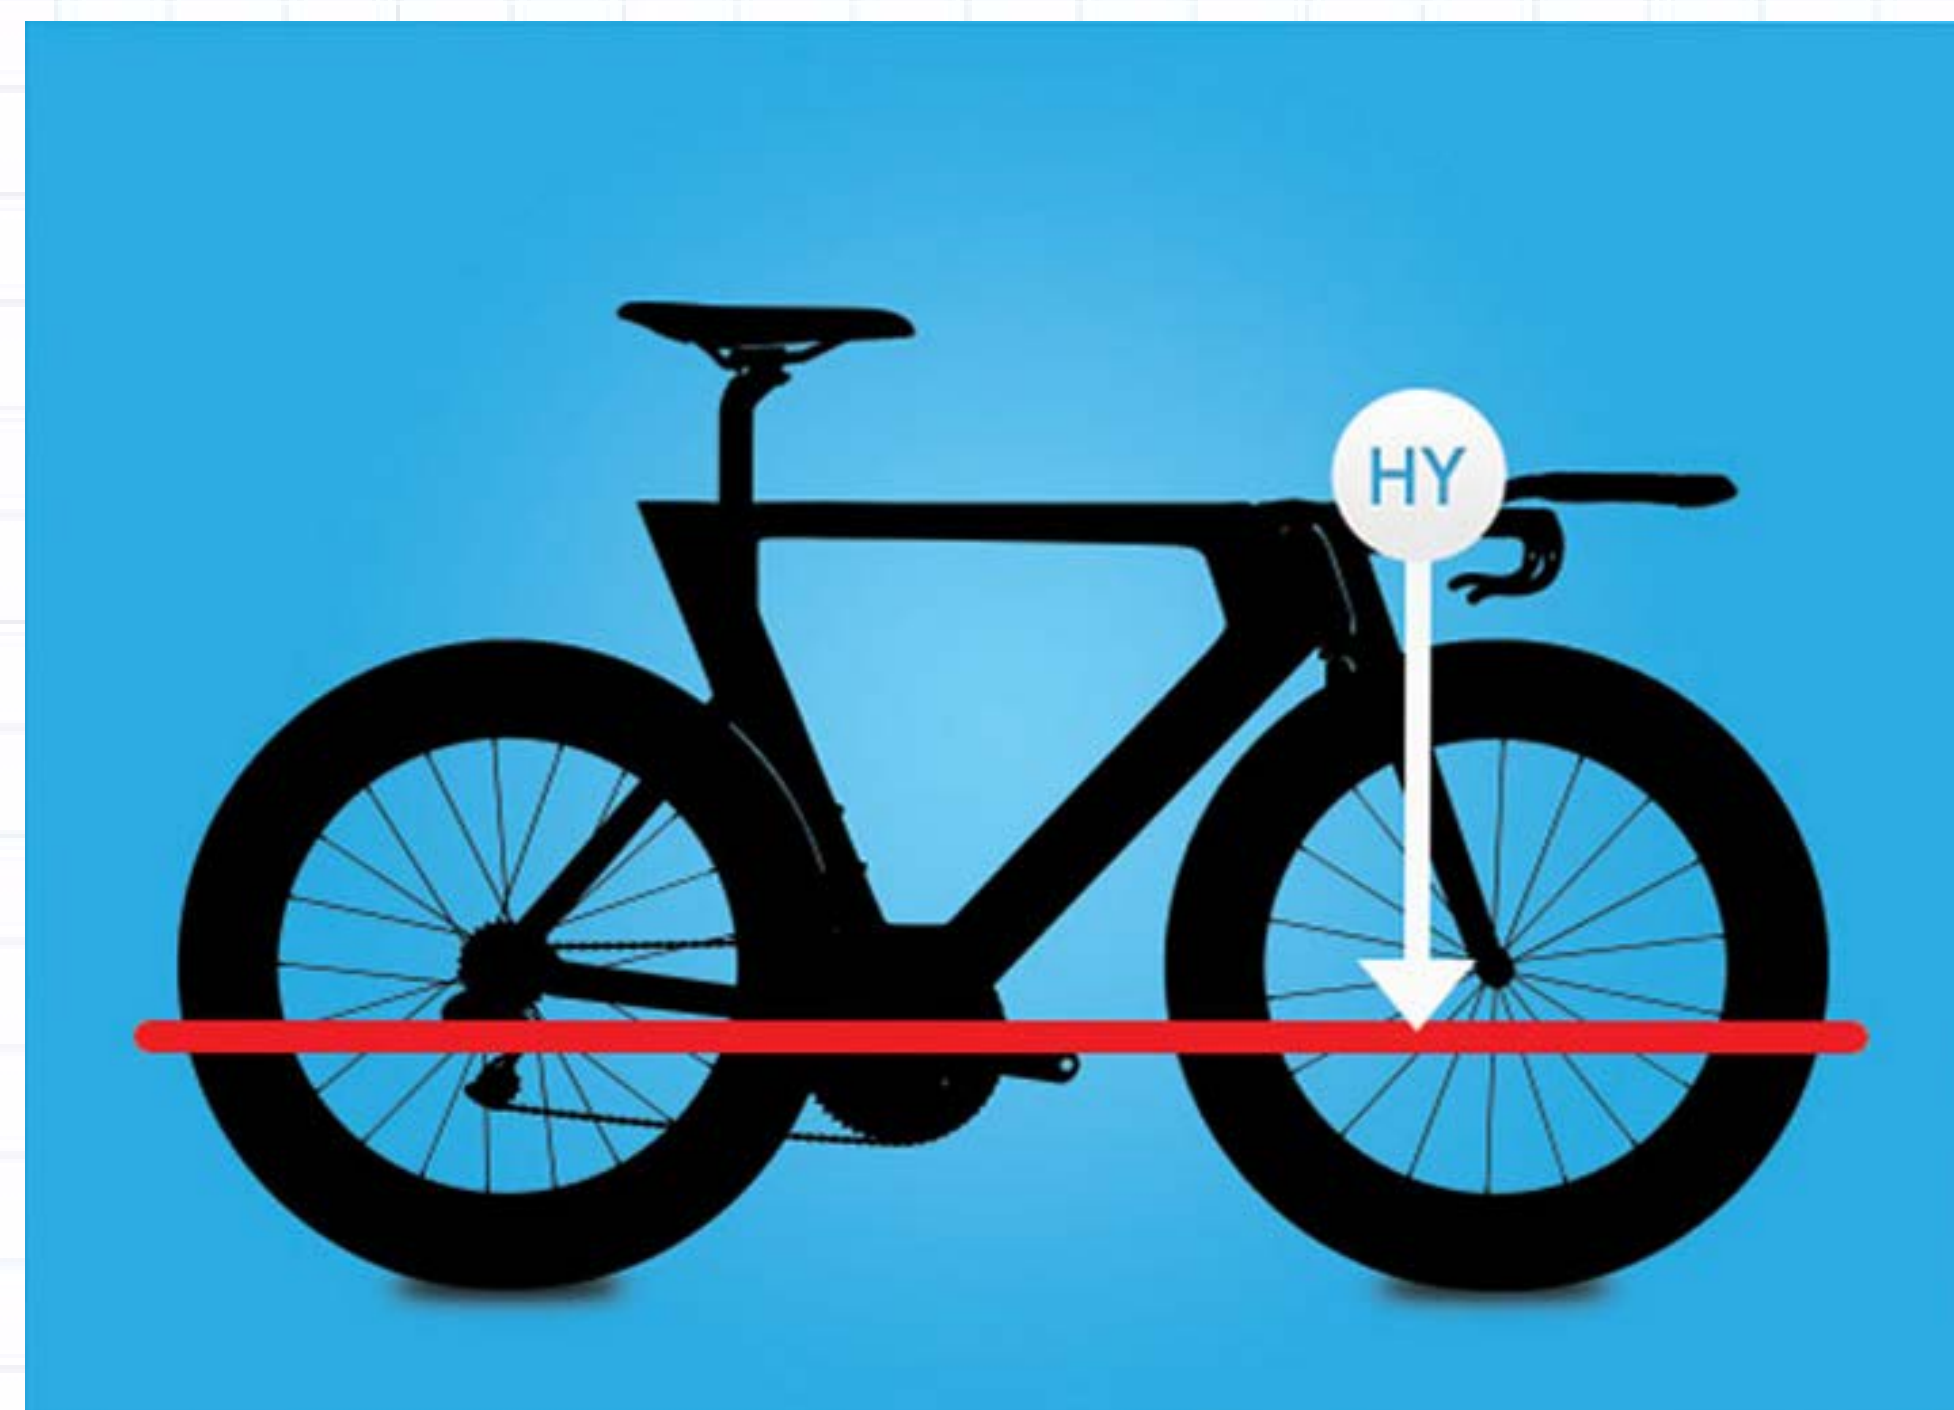

HY is the distance from middle of the handlebar to horizontal laser line.